

TC-399



STEREO TAPE DECK

SPECIFICATIONS

Power Requirements:	120V ac, 60 Hz (US, Canadian model) 110V, 120V, 220V, 240V, 50/60 Hz (UK, AEP model)	Track:	4-track 2-channel stereo
Power Consumption:	25W (US, Canadian model) 35W (AEP, UK model)	Tape Speed:	19 cm/s (7 1/2 ips), 9.5 cm/s (3 3/4 ips) 4.8 cm/s (1 7/8 ips)
Dimensions:	415 (w) x 435 (h) x 190 (d) mm 16 3/8 (w) x 17 1/4 (h) x 7 1/2 (d) inches including projecting parts and controls	Recording Time:	With 550 m tape, 18 cm reel Stereo recording: 90 min. at 19 cm/s Mono recording: 360 min. at 9.5 cm/s
Weight:	Approx. 12.6 kg (27 lb 13 oz) (US, Canadian model) Approx. 12.9 kg (28 lb 7 oz) (UK, AEP model)	Fast Winding Time:	Approx. 120 sec. with 370 m tape
		Reel:	18 cm or smaller
		Heads:	1 record head, 1 playback head, 1 erase head
		Record Bias Frequency:	160 kHz
		Equalization:	NAB standard (US, Canadian model) JIS standard 19 cm/s 3,180 μ s \pm 50 μ s 9.5 cm/s 3,180 μ s \pm 90 μ s (UK, AEP model)
		S/N Ratio:	With Sony Ferri-Chrome Tape 61 dB at peak level (NAB) 58 dB (DIN, 1975 rev.): (UK, AEP model)

— Continued on page 2 —

SONY®
SERVICE MANUAL

TC-399

Total Harmonic Distortion: 0.8%

Frequency Response: With Sony Ferri-Chrome tape or SLH tape
30–25,000 Hz ±3 dB at 19 cm/s
30–18,000 Hz ±3 dB at 9.5 cm/s
With regular tape
30–18,000 Hz ±3 dB at 19 cm/s
30–15,000 Hz ±3 dB at 9.5 cm/s

Wow and Flutter: 0.06% at 19 cm/s (NAB)
±0.09% at 19 cm/s (DIN): (UK, AEP model)
0.09% at 9.5 cm/s (NAB)
±0.12% at 9.5 cm/s (DIN): (UK, AEP model)


Inputs: MIC (two phono jacks)
sensitivity 0.25 mV (-70 dB)
for low impedance microphone
LINE IN (two phono jacks)
sensitivity 77.5 mV (-20 dB)
input impedance 100 kΩ
REC/PB (DIN connector): (UK, AEP model)
input impedance less than 10 kΩ

Outputs: LINE OUT (two phono jacks)
output level 0.435V (-5 dB) at load
impedance of 100 kΩ, with PB LEVEL
controls set to center-detent position;
0.775V (0 dB) with the PB LEVEL
controls set to "10"
suitable load impedance more than 10 kΩ
HEADPHONES (binaural jack)
output level 38.8 mV (-26 dB)
at load impedance 8 Ω with PB LEVEL
controls set to center-detent position
REC/PB (DIN connector): (UK, AEP model)
output impedance less than 10 kΩ


$$0\text{dB} = 0.775\text{V}$$

MODEL IDENTIFICATION (Specification Label)


(US model)

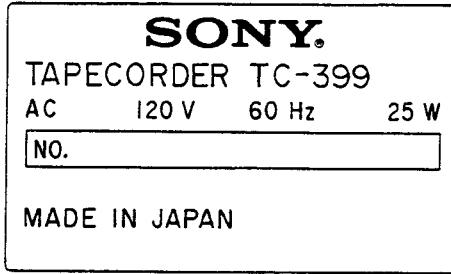

(Canadian model)

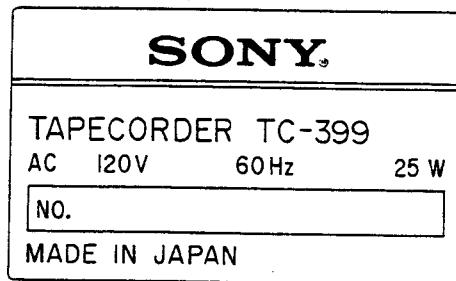

(AEP, UK model)

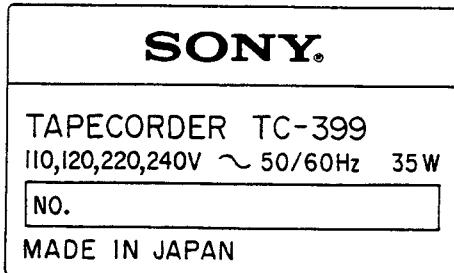


POWER FREQUENCY ADAPTATION

The motor pulley and tapping of the motor capacitor terminals must be changed, if the line frequency differs from what the recorder is set for.

1. To change connection of the motor capacitor terminals


The motor capacitor is located at the upper side of the drive mechanism. Change the connection of the motor capacitor terminals by soldering as illustrated.

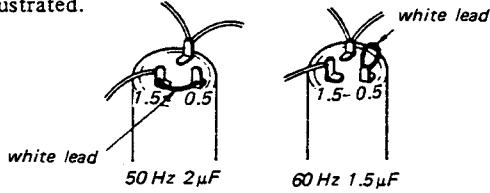

2. To change motor pulley

Remove the panel as described in DISASSEMBLY on page 5.

1. Remove the pause stroke adjusting plate by loosening the screw **A**. Withdraw the pause pull rod.
2. Remove a rubber belt from the motor pulley and idler wheel.
3. Remove the motor pulley by loosening two screws **B** and **C** which hold the motor pulley.
4. Use the supplied motor pulley with the same mark and tighten the screws.

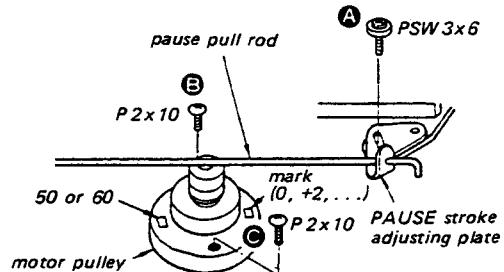


Motor Pulley Part No.			
for 50 Hz		for 60 Hz	
Mark on Motor Pulley	Part No.	Mark on Motor Pulley	Part No.
+2	3-518-067-61	+2	3-518-068-61
+1	3-518-067-51	+1	3-518-068-51
+0.5	3-518-067-41	+0.5	3-518-068-41
0	3-518-067-01	0	3-518-068-01
-0.5	3-518-067-11	-0.5	3-518-068-11
-1	3-518-067-21	-1	3-518-068-21
-2	3-518-067-31	-2	3-518-068-31


C-399

SECTION 1 OUTLINE

1-1. BLOCK DIAGRAM

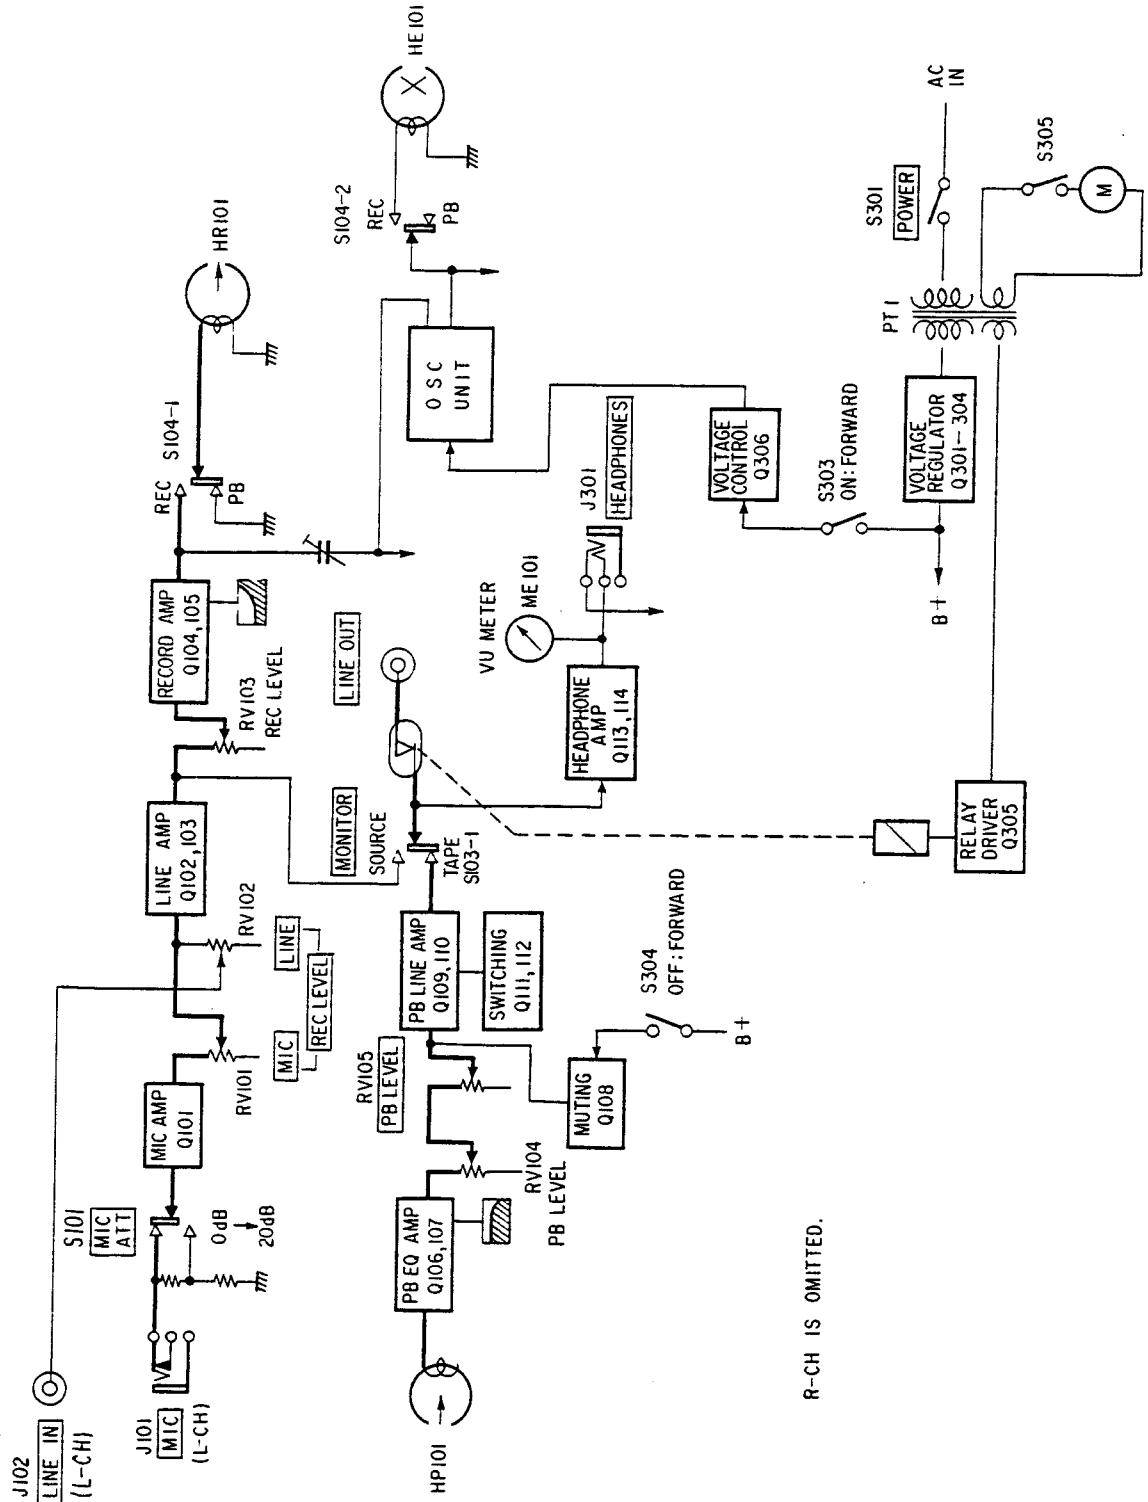

HEAD DECK ASSEMBLY REMOVAL

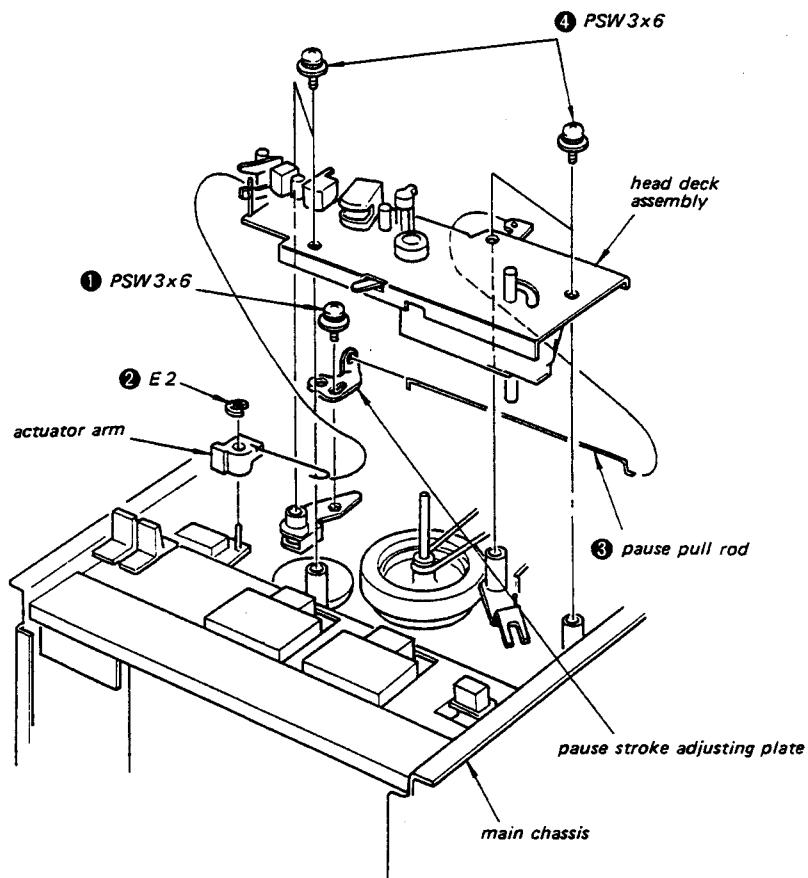

Note: After installing the head deck assembly,
perform the Pause Stroke Adjustment.


SECTION 2 DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.

PANEL ASSEMBLY AND MAIN CHASSIS REMOVAL

① to ⑩ : Panel Assembly Removal


⑪ to ⑯ : Main Chassis Removal

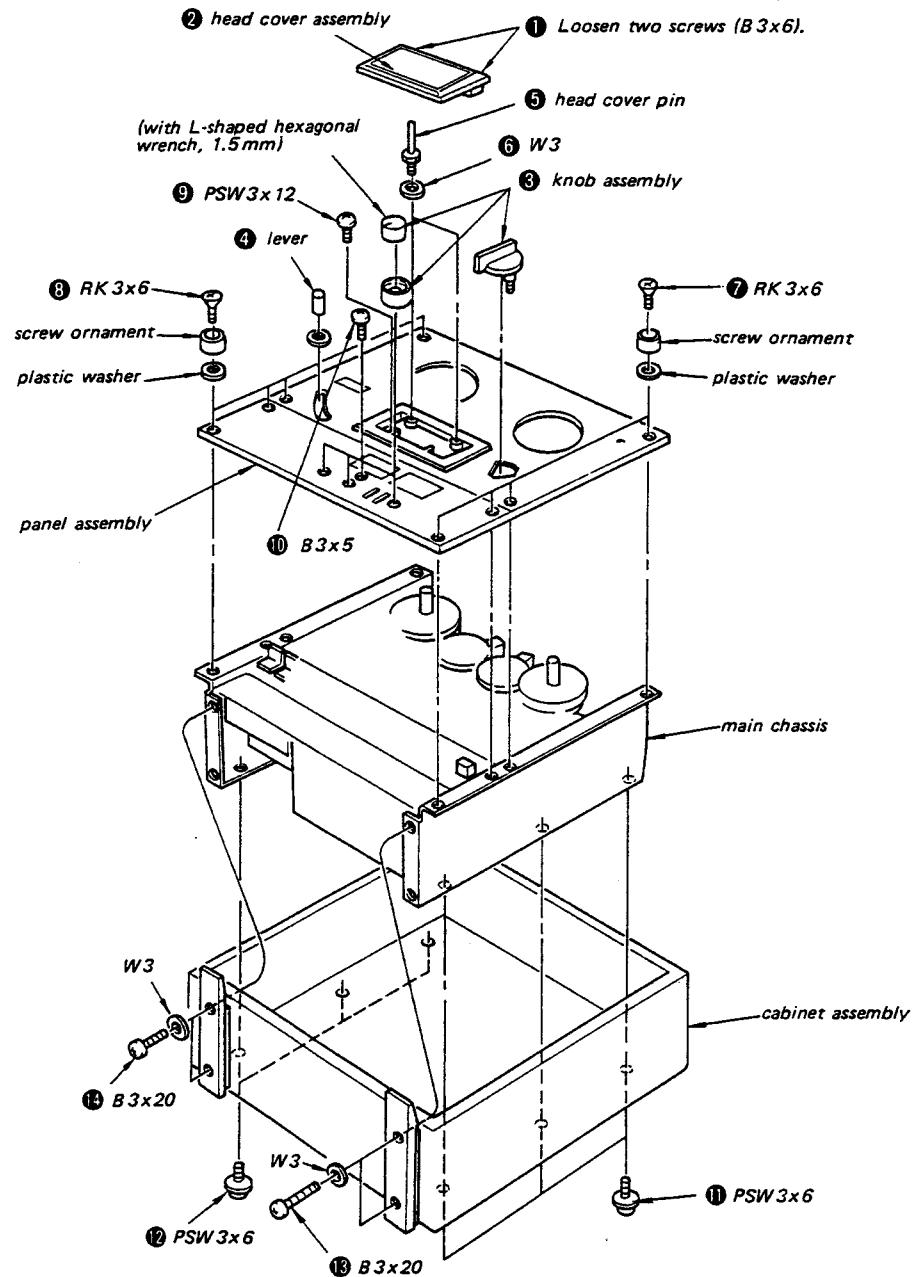

Pinch Roller Pressure Check


- stop mode -

1. Remove the head deck assembly.
2. Put a dummy capstan into the capstan bearing and be sure that the clearance between pinch levers (A) and (B) is 0.2–1 mm.

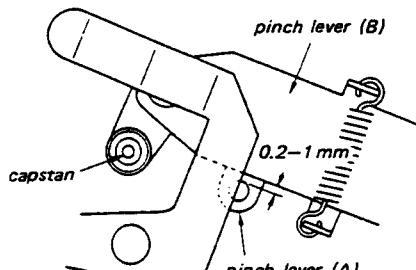


head deck – back view –

3. Be sure that the tension gauge indicates 800–1,000 g (1 lb 12 oz–2 lb 3 oz) when the pinch roller is detached from the capstan in forward mode.

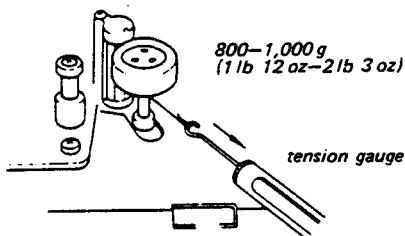




Bias Osc Switch (S303) Position Adjustment

Loosen the two screws and adjust the switch position for the specified clearance. The switch should be turned on in forward mode. Confirm, when the mode is changed slowly from forward to stop, the record levers release after the switch is turned off.

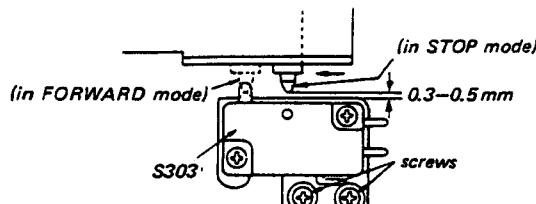

Pinch Roller Stroke Adjustment

1. Remove the head deck assembly.
2. Loosen the adjustment screw and adjust the position of the joint lever so that the pinch roller shaft comes in contact with the retractive lever at position **A** in stop mode.
3. Fix the adjustment screw while pushing the joint lever in the direction shown by the arrow.
4. Put the dummy capstan into the capstan bearing and be sure that the pinch roller shaft moves on surface **B** of the retractive lever when the mode is changed from stop to forward.
5. Be sure that the washer on the pinch roller shaft does not come in contact with position **C** when the mode is slowly changed from forward to fast forward.

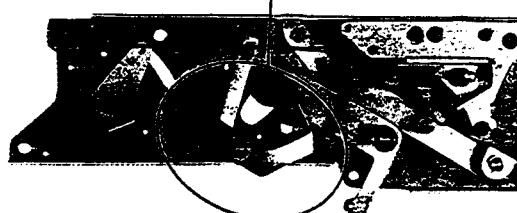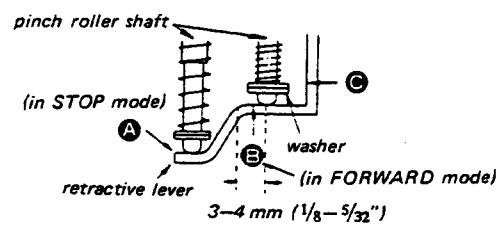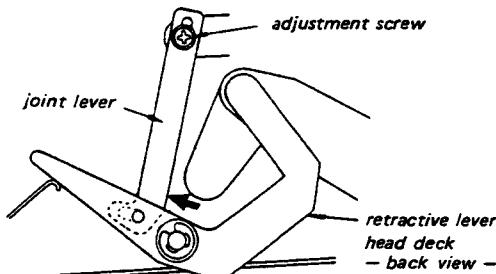

*Head deck
– bottom view –*

SECTION 3 ADJUSTMENTS

3-1. MECHANICAL ADJUSTMENT

PRECAUTION


- Clean the following parts with a denatured-alcohol-moistened swab:

record head	pinch roller
playback head	rubber belts
erase head	idle
capstan	tape guides
- Demagnetize the record head and the playback head with a head demagnetizer.
- Do not use a magnetized screwdriver for the adjustments.
- After the adjustments, apply a suitable locking compound to the parts adjusted.
- Adjustments should be performed in the order given in this service manual.
- The adjustments and measurements should be performed with the rated power supply voltage unless otherwise noted.

Tension Regulator Back-tension Adjustment

— forward and fast forward modes —

Note: This adjustment should be performed after the Tension Regulator Adjustment shown at the left.

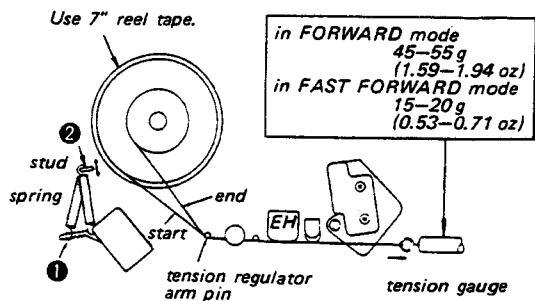


- Adjust by changing the spring hook position.
- If necessary, bend the stud or perform the tension regulator adjustment again.



Tension Regulator Adjustment

— stop mode —

- Loosen the adjustment screw and adjust the tension regulator arm for the clearance after turning the supply reel table counterclockwise by hand.

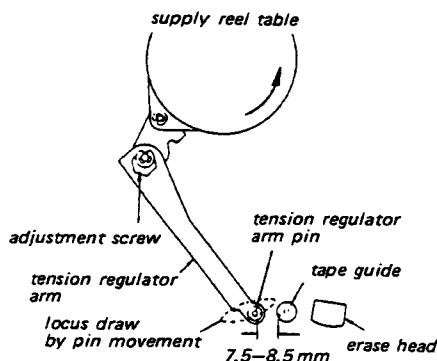


- Tape should be in contact with the tension regulator arm pin uniformly at both the beginning and end portions of it. If necessary, bend the portion A.

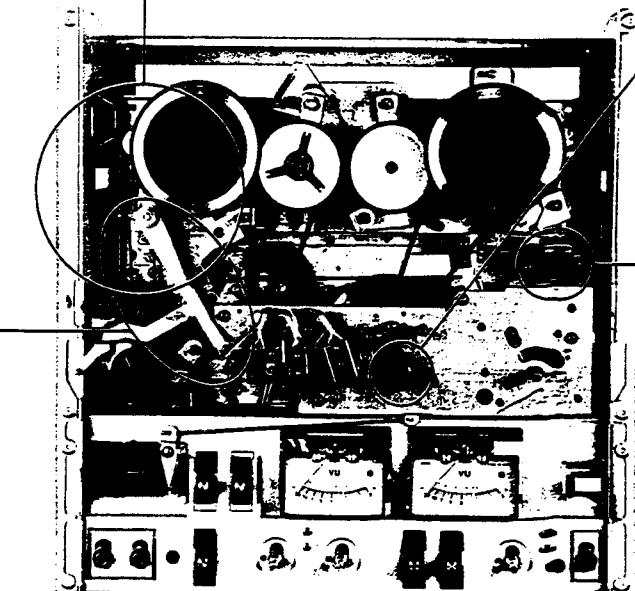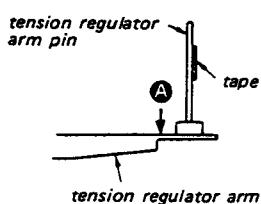




Pause Stroke Adjustment**- stop mode -**

Note: This adjustment should be performed after the Tension Regulator Adjustment shown on page 7.




1. Adjust screw **A** so that the distance between the end of the pause pull rod and the pause stroke adjustment plate is 4–5 mm in stop mode.
2. Be sure that the clearance between the pinch roller and the capstan is 0.5–1 mm when pulling the pause lever in forward mode, and the PAUSE lever (controlled by user) is not locked when pulling the pause lever in stop mode.
3. Adjust screw **B** so that the clearance between the tension regulator arm and the pause leaf spring is 2–3 mm in stop mode. The brake should work, when pulling the pause lever in forward mode.

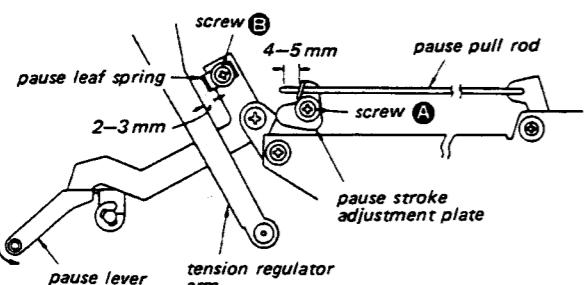**Speed Selector Cam Position Adjustment****- forward mode -**

Turn the adjustment screw and locate the idler arm pin in the slot at 19 cm/s tape speed.

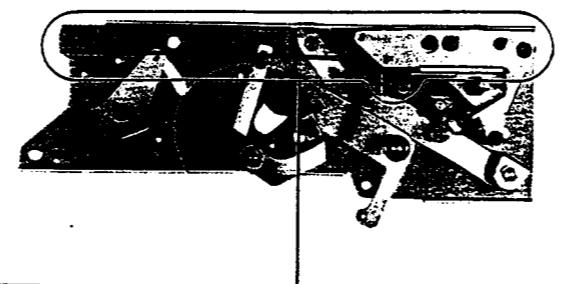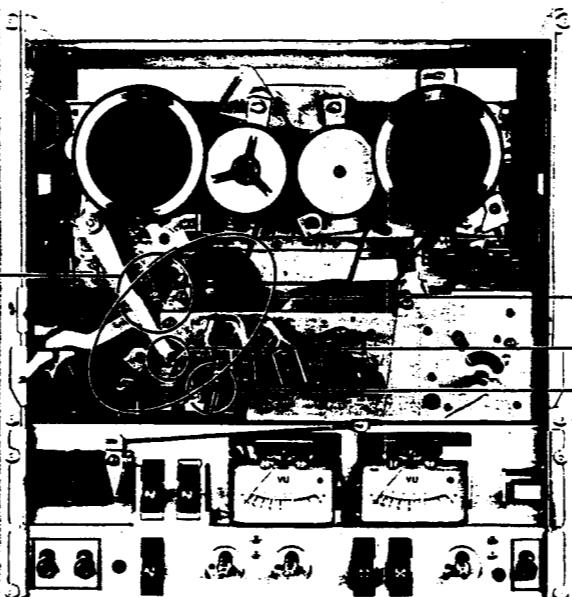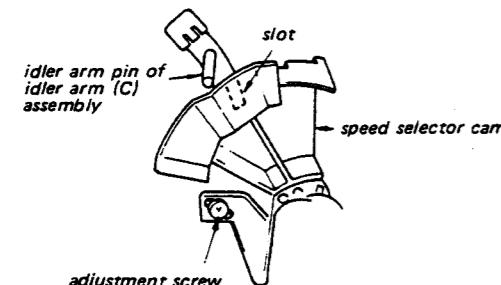**Shut-off Mechanism Adjustment****- stop mode -**

1. Remove the head deck assembly.
2. Loosen two screws **A** and adjust the position of the shut-off lever holding plate assembly so that the shut-off mechanism is locked when the clearance between the shut-off arm end and head deck is 7 mm, and the shut-off mechanism is released completely when it is 3–5 mm.
3. Adjust screw **B** so that the clearance between shut-off levers (B) and (H) is 0.3–0.6 mm in stop mode.

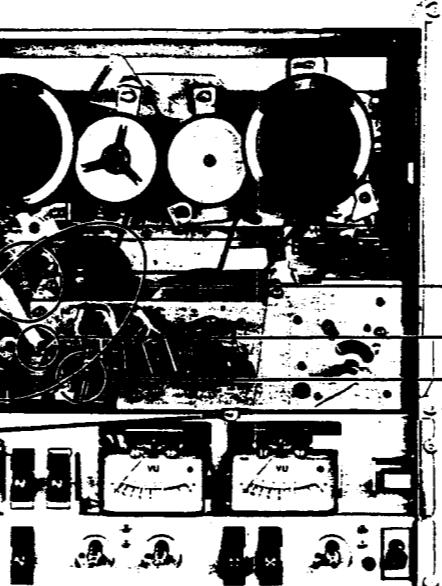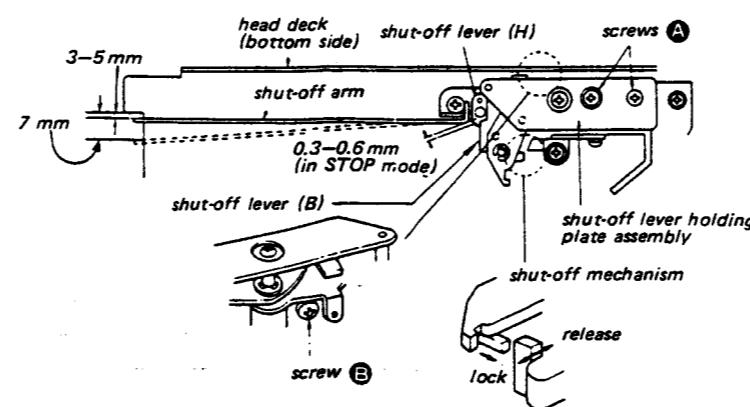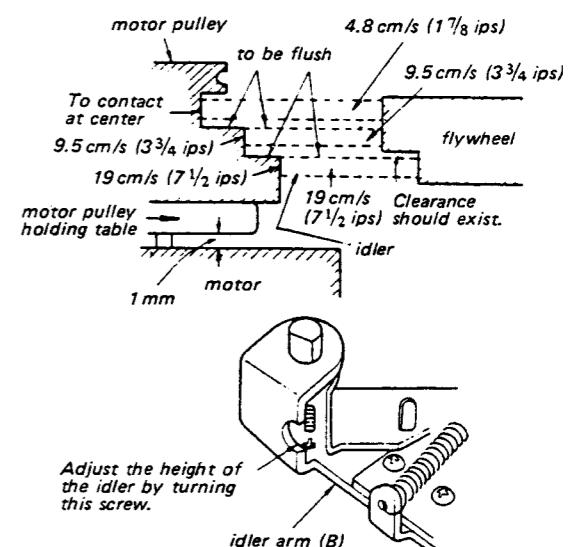
**Capstan Idler Position Adjustment****- forward mode -**

After the adjustment, the capstan idler should not come in contact with the flywheel and the 60 Hz motor pulley in stop mode and the clearance between the capstan idler and the 50 Hz motor pulley is more than 3 mm in stop mode.


Idler Arm (C) Stroke Check**- forward mode -**

At 4.8 cm/s (1 7/8 ips) tape speed:

50 Hz	The clearance is 0.5–0.7 mm.
60 Hz	The clearance is 0.3–0.5 mm.


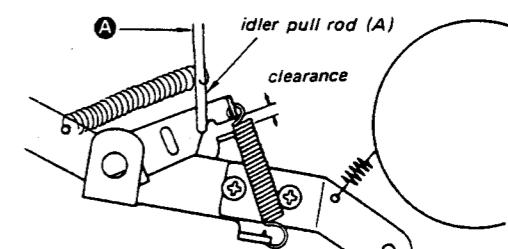
**Scrape Flutter Filter Roller Check****- forward mode -**

At 4.8 cm/s (1 7/8 ips) tape speed.


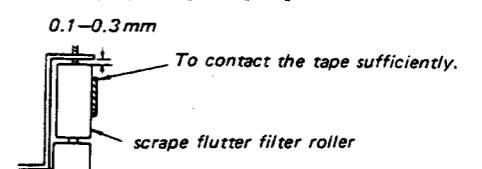


Fast Forward and Rewind Torque Adjustment**- fast forward and rewind modes -**

Adjust the position of leaf spring to obtain the specified values on torque meter. (Read the values when the driving idler just stops.) As the leaf spring is positioned in lower position, the torque decrease.

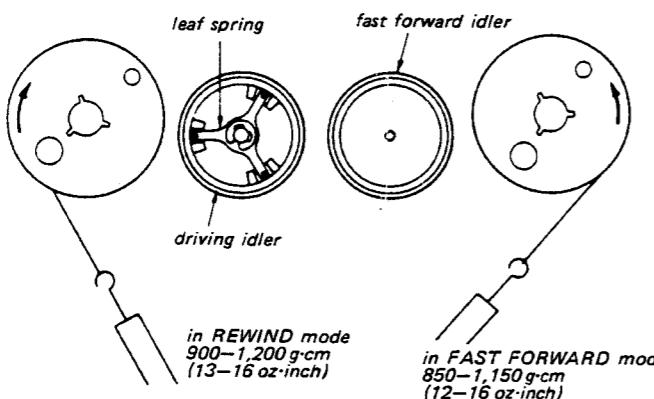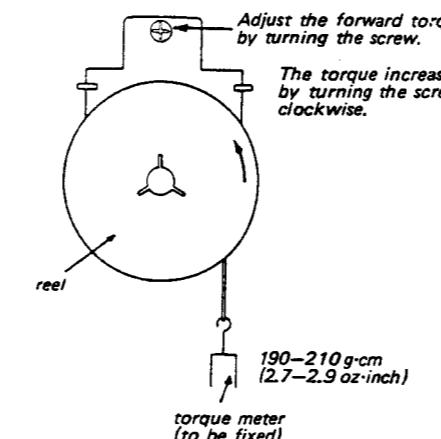
**Forward Torque Adjustment****- forward mode -****Fast Forward and Driving Idler Height Adjustment****- stop mode -**

If necessary, bend the idler arms for the clearance.

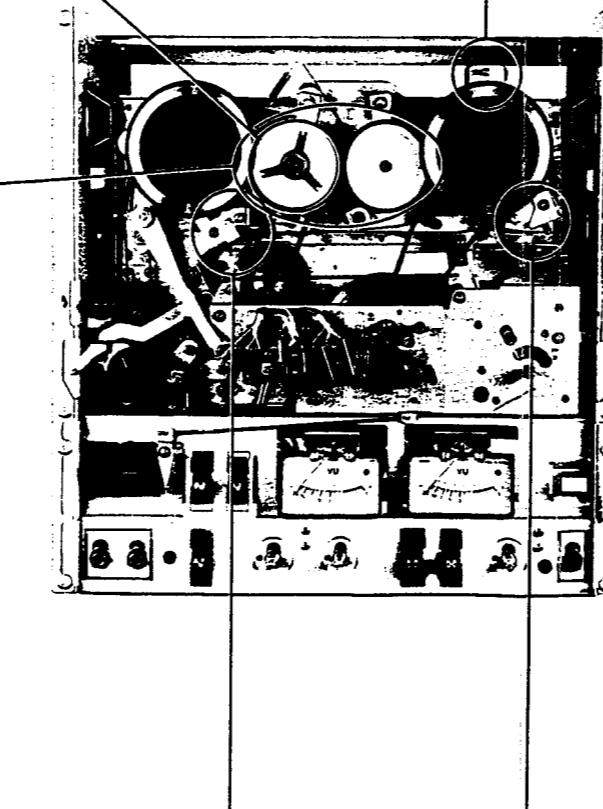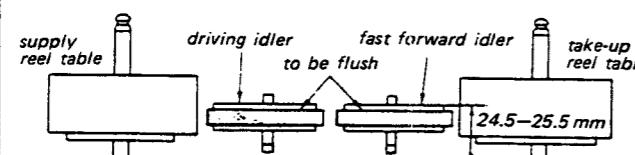
**Brake Adjustment****- stop mode -**

Note: After performing the Tension Regulator Adjustment, adjust the supply brake torque.

supply brake torque	direction A	150-250 g·cm (2.09-3.47 oz-inch)
	direction B	1300-1700 g·cm (18.07-23.63 oz-inch)

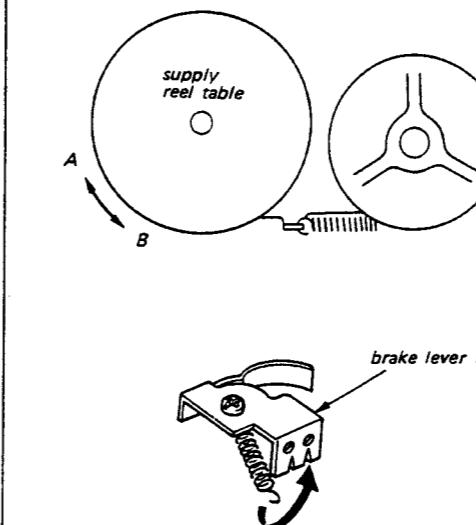


- If the meter reading is less than the specified value, hook the spring at the right hole.

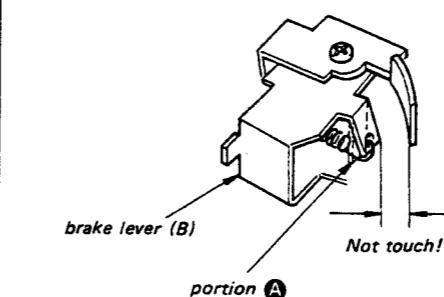

- If the meter reading is more than the specified value, bend the portion A.

take-up brake torque	direction C	350-450 g·cm (4.87-6.2 oz-inch)
	direction D	1300-1700 g·cm (18.07-23.63 oz-inch)

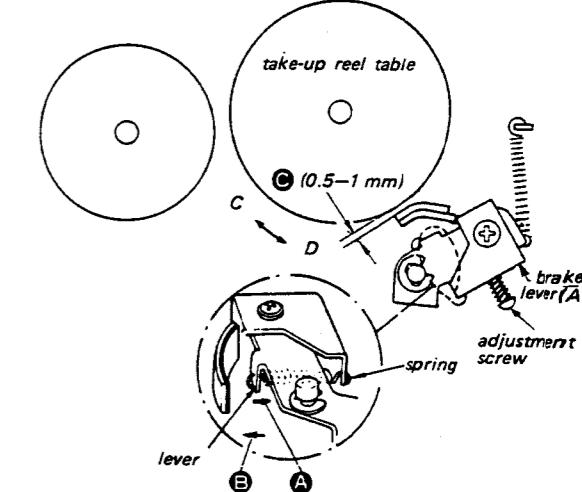


1. Turn the adjustment screw for the clearance C in record mode.
2. If necessary, bend the lever.



Meter reading	Bending direction
more than specified value	A
less than specified value	B

Flywheel Brake Check**- rewind mode -**

1. The brake should touch the flywheel in both rewind and stop modes.
2. The break should separate from the flywheel in both forward and fast forward modes.

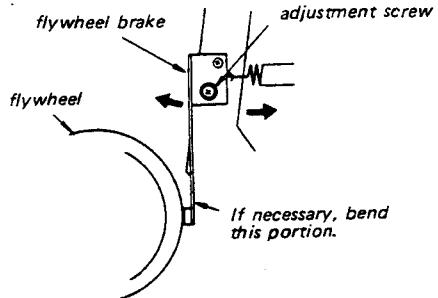
**Motor Switch (S305) Position Adjustment**

1. With the shut-off mechanism locked and a tape threaded, loosen the adjustment screw and adjust the position of the switch so that the switch turns on.
2. Push the shut-off arm in the direction **A**. The switch should turn off when the shut-off mechanism is released.

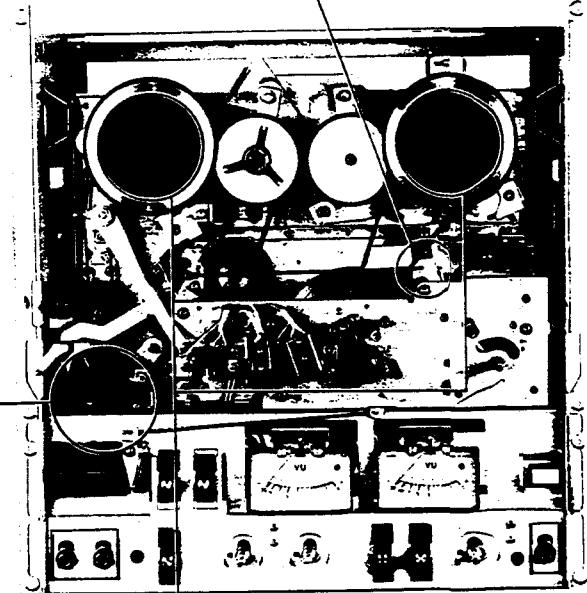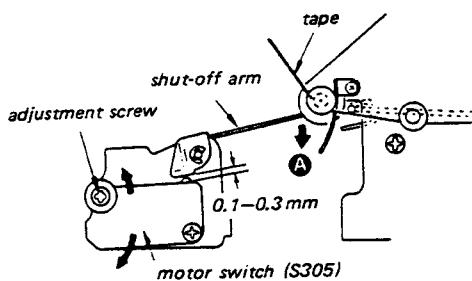**Reel Table Height Adjustment****- forward, rewind and fast forward modes -**

Note: Perform this adjustment for both the supply and take-up reels.

1. Adjust the reel table height by bending the chassis with a screwdriver to eliminate the tape touch to the flanges by using a standard 7-inch tape reel.
2. In playback mode, confirm that the tape does not touch the reel flanges at the tape start and tape end.
3. After the adjustment, recheck the playback torque and back tension.

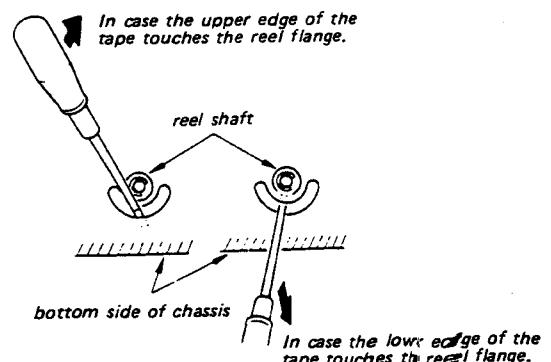

3-2. ELECTRICAL ADJUSTMENT

Note: When connecting the measuring equipments to the input or the output jack, take the impedance matching correctly.

Test Tape J-19-F2:

Tone	1	2	3	4	5	6	7
Frequency (Hz)	400	400	10k	12.5k	7k	80	40
Level (dB)	0	-10	-10	-10	-10	-10	-10

Standard Record:

Set the REC LEVEL control for the specified output level.

Standard Input Level

	MIC	LINE IN
source impedance	300Ω	10 kΩ
input level	0.77 mV (-60 dB)	0.25 V (-10 dB)

Standard Output Level

	LINE OUT
load impedance	100 kΩ
output level	0.435 V (-5 dB)


Note on Replacing the Heads

1. Erase Head Removal

When removing the erase head from the head deck, remove the two screws shown with ▲.
(Do not remove the three screws shown by *.)

2. Record of Playback Head Removal

When removing the record or the playback head, remove the respective angle adjustment screws.
(Do not turn the screws except the angle adjustment screws).

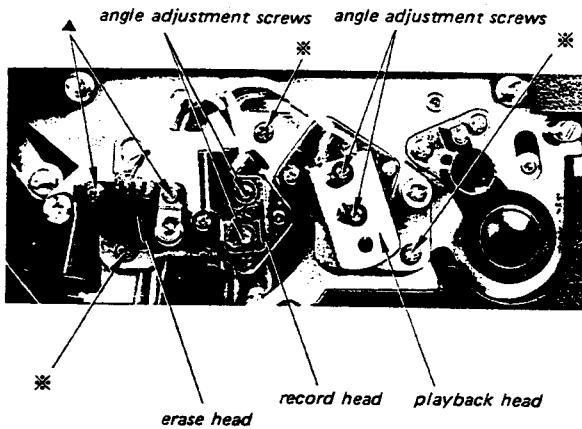


Tape Speed Adjustment**Settings:**

TAPE SPEED selector: 19 cm/s (7½ ips)
 MONITOR switch: TAPE
 PB LEVEL control: center-detented position


Procedure:

Mode: playback at 19 cm/s (7½ ips)

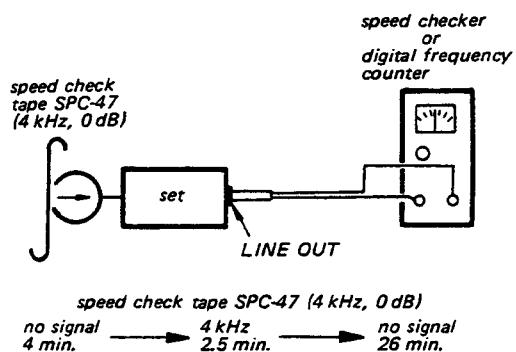**Specification:**


Speed checker	Digital frequency counter
1%	3,960–4,040 Hz


If necessary, replace the motor pulley.

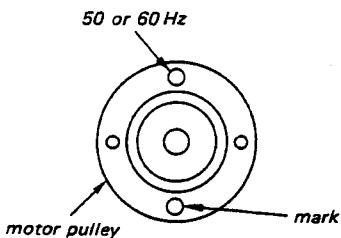


50 Hz		
Mark	Part No.	Tape speed
+2	3-518-067-61	+2% fast
+1	3-518-067-51	+1%
+0.5	3-518-067-41	+0.5%
0	3-518-067-01	standard
-0.5	3-518-067-11	-0.5%
-1	3-518-067-21	-1%
-2	3-518-067-31	-2% slow

60 Hz		
Mark	Part No.	Tape speed
+2	3-518-068-61	+2% fast
+1	3-518-068-51	+1%
+0.5	3-518-068-41	+0.5%
0	3-518-068-01	standard
-0.5	3-518-068-11	-0.5%
-1	3-518-068-21	-1%
-2	3-518-068-31	-2% slow

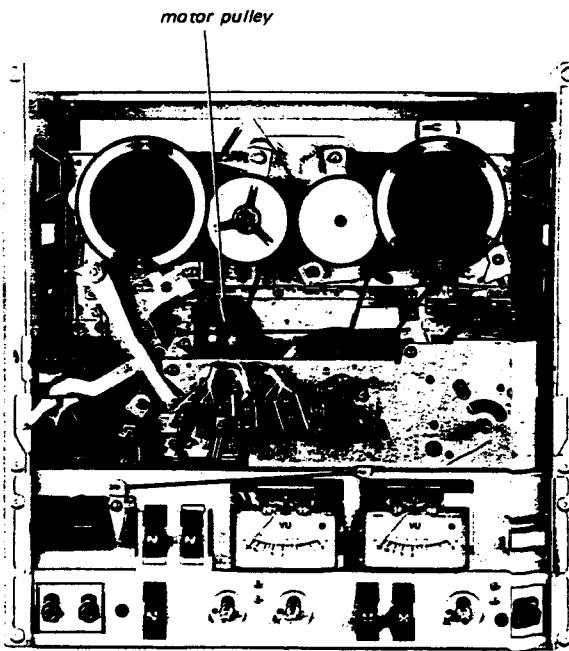Adjustment Location:

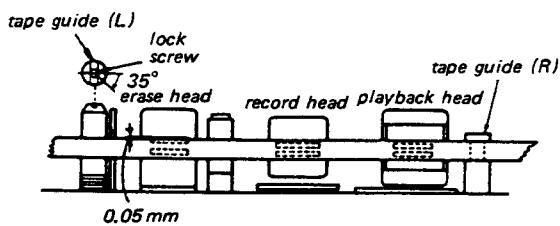
Tape Path Adjustment**A. Tape Guide (left) Adjustment****Procedure:**

1. Thread a tape and place the set in playback mode.
2. Loosen the lock screw and align the upper edge of the erase head core and that of the tape by turning the tape guide (L).
3. Turn the tape guide (L) clockwise by approximately 35 degrees from the position obtained in the preceding step so that the upper edge of the tape is approximately 0.05 mm lower than the upper edge of the erase head core.
4. Fix the tape guide with the lock screw.

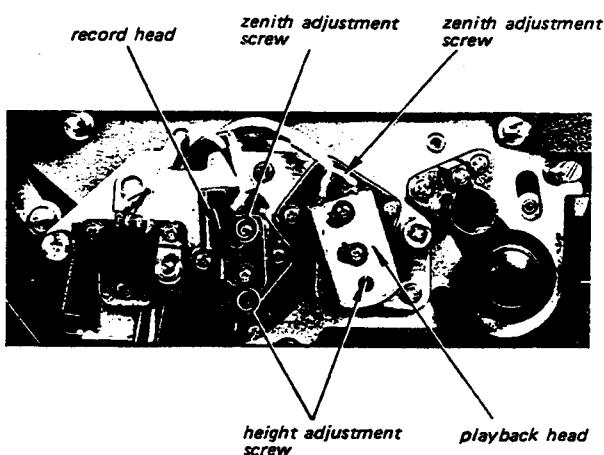
Adjustment Location:**B. Record and Playback Head Preadjustment**


(Rough adjustment for the Playback Head Angle Adjustment and Playback Head Azimuth Adjustment)

Note: This adjustment and the following adjustments (Playback Head Angle Adjustment and Playback Head Azimuth Adjustment) should be repeated alternately several times.

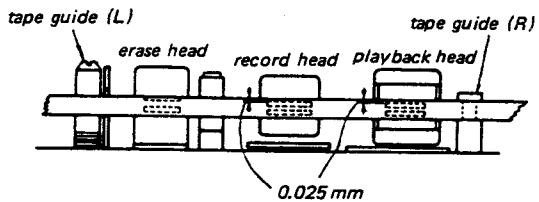**Procedure:**

1. Align the upper edges of the record and playback head cores and that of the tape by evenly turning the record and playback head height adjustment screws.
2. Turn the record and playback head height adjustment screws clockwise by approximately 15 degrees so that the upper edges of the record and playback head cores are 0.025 mm lower than that of the tape and memorize the angle of turns.
3. Turn the zenith adjustment screws by the same angle of turns to the same direction as the record and playback head height adjustment screws.
4. Thread the tape Super 150 or PS-2 and place the set in playback mode at 19 cm/s (7½ ips).
5. Make the tape loose a little by pushing the tension regulator arm pin in the direction shown by the arrow and then adjust the playback head and record head zenith adjustment screws to obtain the reflection of light as shown below.

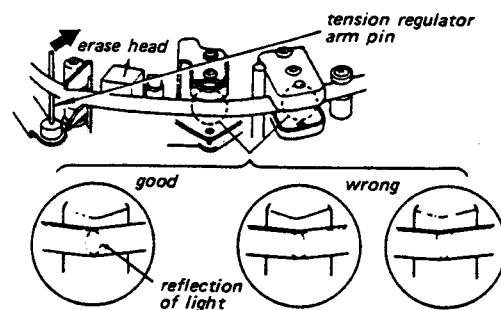

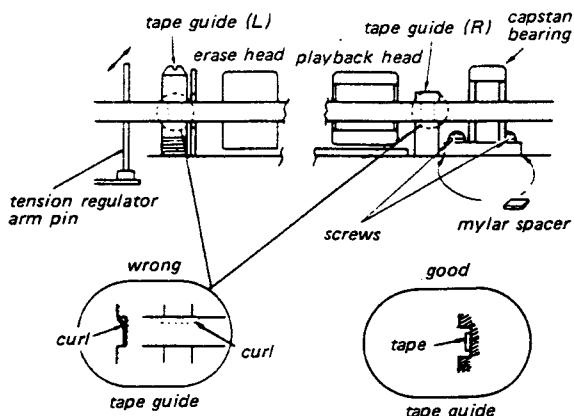Tape Curl Adjustment**Procedure:**

1. Thread the tape Super 200 (thin tape) and place the set in playback mode at 4.8 cm/s ($1\frac{1}{8}$ ips).
2. Be sure that the tape comes in contact with the two tape guides exactly as shown above.
 - a) If the tape curls at the tape guide (L), adjust by bending the tension regulator arm pin.
 - b) If the tape curls at the tape guide (R), loosen the two capstan bearing holding screws and adjust by adding or removing the mylar spacer.

Note: After adding or removing the mylar spacer (0.1 mm thick), perform the playback head zenith adjustment. (See "Record and Playback Head Preadjustment" on page 16.)


Playback Head Angle Adjustment**Settings:**

TAPE SELECT EQ switch: NORMAL
 TAPE SPEED selector: 19 cm/s ($7\frac{1}{2}$ ips)
 MONITOR switch: TAPE
 PB LEVEL control: center-detented position

Procedure:


1. Mode: playback

test tape
 J-19-F2
 4th tone
 (12.5 kHz, -10 dB)

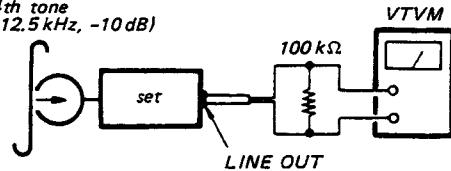

2. Adjust the angle-adjustment screws for a maximum reading.
3. Apply back-tension by holding the supply reel table, and then adjust the angle of the head by loosening the two angle-adjustment screws so that the readings on both L-CH and R-CH do not rise.

Note: Unless the playback head is installed at correct angle, the readings will rise.

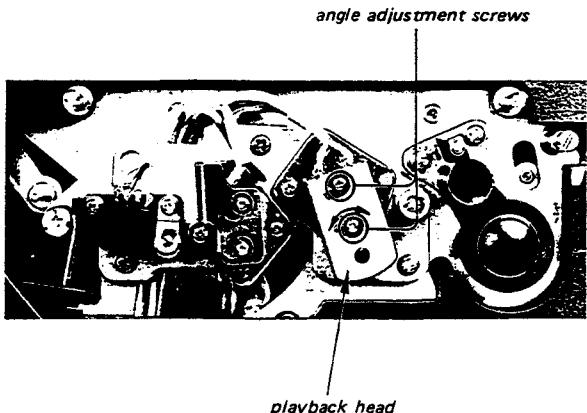Adjustment Location:

Playback Head Azimuth Adjustment


Settings:

TAPE SELECT EQ switch: NORMAL
 TAPE SPEED selector: 19 cm/s (7½ ips)
 MONITOR switch: TAPE
 PB LEVEL control: center-detented position


Procedure:

1. Be sure that the playback head is fixed sufficiently to the head deck with the holding screw as shown below and "Tape Path Adjustment" has been made.
2. Mode: playback

test tape
J-19-F2
 4th tone (12.5 kHz, -10 dB)


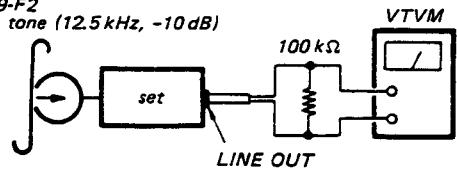


3. Turn the azimuth adjustment screw for the maximum level and set it to the mechanical mid position between L-CH and R-CH peak positions.

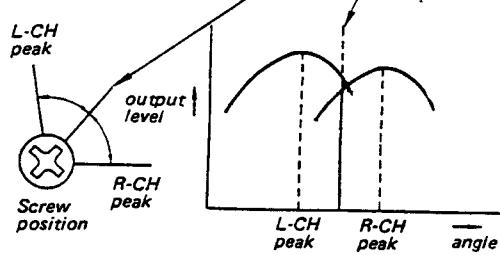


4. Mode: playback

test tape
J-19-F2
 3rd tone (10 kHz, -10 dB)

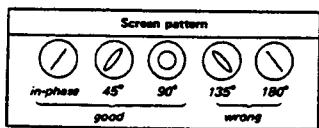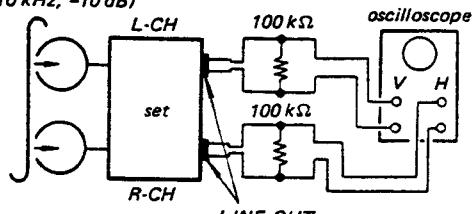

Adjustment Location:

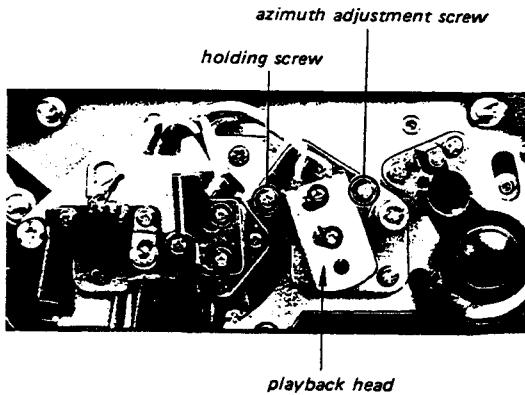


Playback Level Adjustment**Settings:**


TAPE SELECT EQ switch: NORMAL
 TAPE SPEED selector: 19 cm/s ($7\frac{1}{2}$ ips)
 MONITOR switch: TAPE
 PB LEVEL control: center-detented position

Procedure:

1. Mode: playback

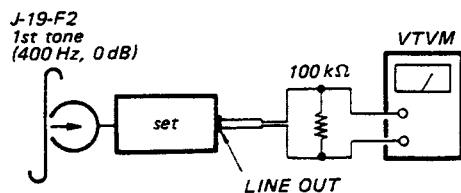


2. Adjust RV104 (L-CH) and RV204 (R-CH) for 0.435 V (-5 dB) reading.

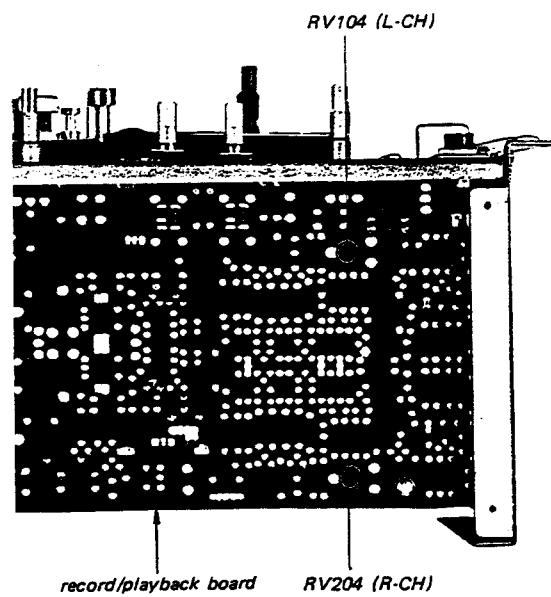Adjustment Location:**VU Meter Calibration****Setting:**

MONITOR switch: SOURCE


Procedure:

1. Mode: record

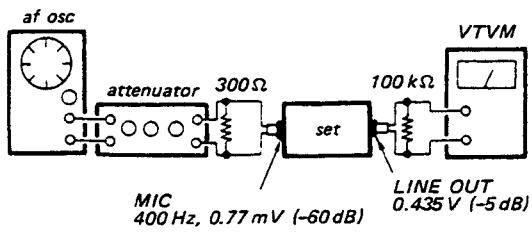

- 2.

Adjust	VU meter indication
RV106 (L-CH)	"0"
RV206 (R-CH)	"0"

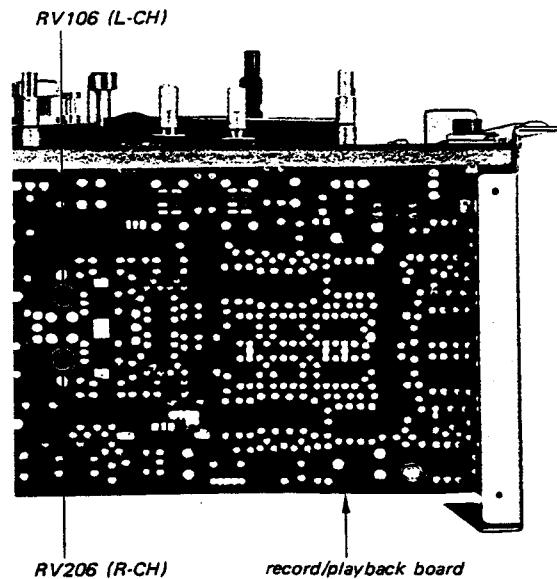Adjustment Location:


Record Head Azimuth and Track Position Adjustment

Settings:


TAPE SELECT switch: SPECIAL
 TAPE SPEED selector: 19 cm/s (7½ ips)
 MONITOR switch: TAPE

Procedure:

1. Mode: standard record and simultaneous playback

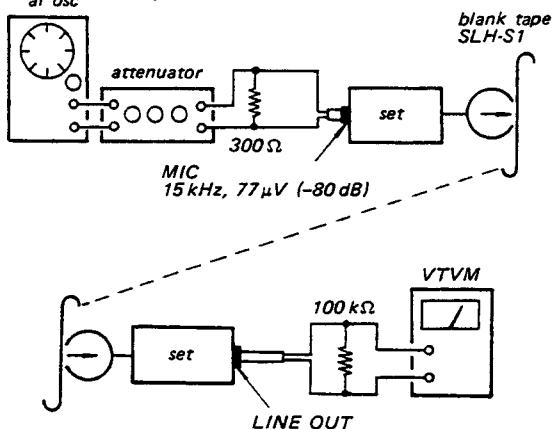


2. Turn the azimuth adjustment screw for the maximum level and set it to the mechanical mid position between L-CH and R-CH peak positions.

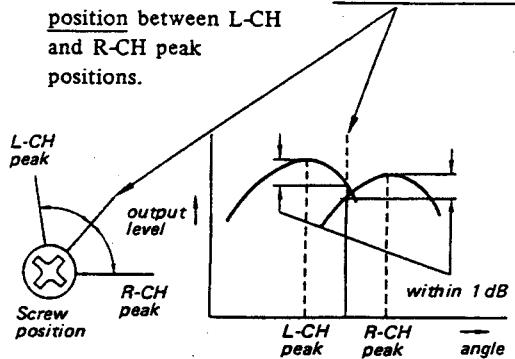

3. Supply a 1 kHz signal of 0.77 mV (-60 dB) into R-CH MIC jack and record and simultaneously playback the signal with the blank tape.
4. Adjust the height adjustment screw for the maximum output and memorize the angle of turns of the screw.
5. Turn the zenith adjustment screw by the same angle of turns obtained in preceding step 4.
6. After the adjustment, check Tape Path Adjustment on page 16 again.

Adjustment Location:

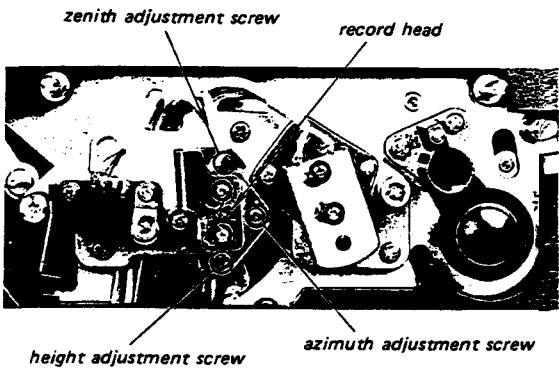


TC-399 TC-399

<p>Bias Trap Coil Adjustment</p> <p>Settings:</p> <p>TAPE SELECT switch: NORMAL TAPE SPEED selector: 19 cm/s (7½ ips) MIC REC LEVEL control: minimum position MONITOR switch: SOURCE</p> <p>Procedure:</p> <ol style="list-style-type: none"> 1. Do not use a shielded lead wire. 2. Place the set in record mode without tape. 3. Adjust L103 (L-CH) and L203 (R-CH) to obtain the minimum reading. <p>Adjustment Location:</p> <p>L103 (L-CH) L203 (R-CH)</p>	<p>Record Bias Adjustment</p> <p>Settings:</p> <p>TAPE SELECT switch: SPECIAL TAPE SPEED selector: 19 cm/s (7½ ips) MONITOR switch: TAPE</p> <p>Procedure:</p> <ol style="list-style-type: none"> 1. Be sure that "Bias Trap Coil Adjustment" has been made. 2. Mode: standard record and simultaneous playback 3. As trimmer capacitor C128 (L-CH) or C228 (R-CH) is slowly turned clockwise, the reading will go up to a maximum and then start falling again. Adjust the capacitor until the VTVM reads 0.5 dB below and beyond the maximum reading. <p>maximum reading LINE OUT level appropriate point clockwise turn of trimmer capacitor</p>	<p>4. Mode: standard record and simultaneous playback</p> <p>af osc attenuator 300Ω set blank tape SLH-S1 MIC 1kHz, 77μV (-80dB) VTVM LINE OUT</p> <p>The LINE OUT level of 20kHz signal is -3 dB-0 dB relative to 1kHz signal level.</p> <p>Adjustment Location:</p> <p>osc board C128 (L-CH) C228 (R-CH)</p>
--	---	--


<p>Record Level Adjustment</p> <p>Setting:</p> <p>TAPE SELECT switch: SPECIAL TAPE SPEED selector: 19 cm/s (7½ ips) MONITOR switch: TAPE</p> <p>Procedure:</p> <ol style="list-style-type: none"> 1. Mode: standard record and simultaneous playback 2. Adjust RV103 (L-CH) and RV203 (R-CH) for 0.435V (-5 dB) reading. 3. Be sure that the reading is 0.435V (-5 dB) when changing the MONITOR switch from TAPE to SOURCE position and the pointer of VU meter stays at "0". 4. When TAPE SPEED switch is changed to 9.5 cm/s (3¾ ips) and 4.8 cm/s (1 7/8 ips), the readings of both L and R channels should be within 2 dB. <p>Adjustment Location:</p> <p>RV103 (L-CH) osc board RV203 (R-CH) record/playback board</p>	<p>Dumm Settin Proced Step 1 2 3 Adjus osc boar</p>
--	---

1. Mode: standard record and simultaneous playback

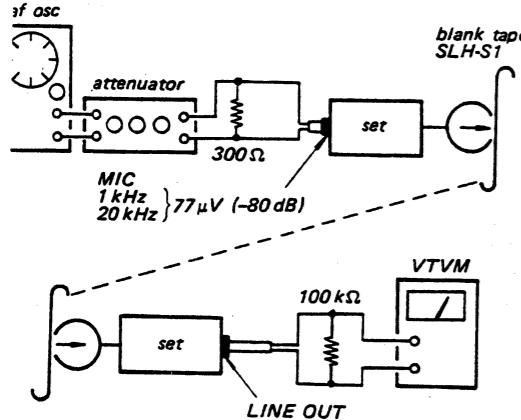

The LINE OUT level of 20kHz signal is -3 dB-0 dB relative to 1kHz signal level.

Adjustment Location:

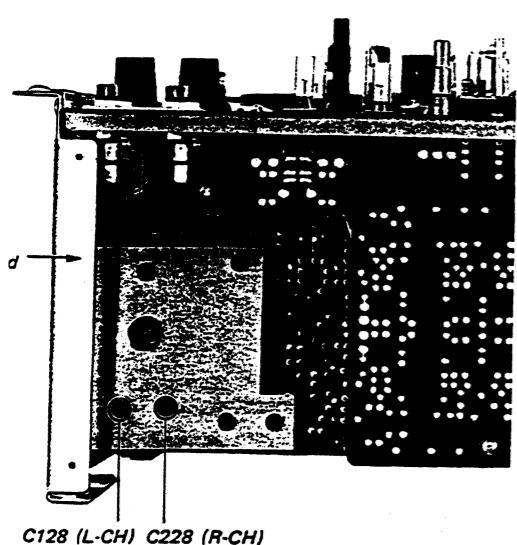


Record Level Adjustment

Setting:

TAPE SELECT switch: SPECIAL
TAPE SPEED selector: 19 cm/s (7½ ips)
MONITOR switch: TAPE


Procedure:

1. Mode: standard record and simultaneous playback

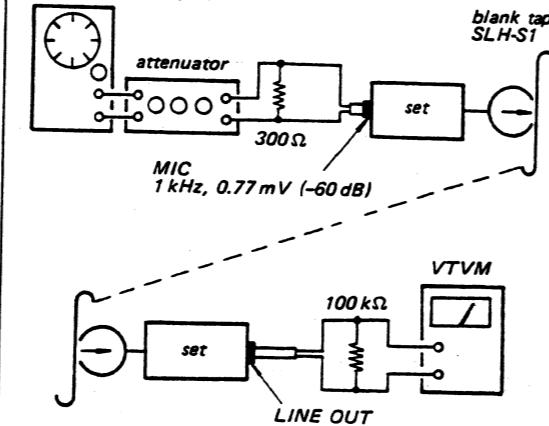

2. Adjust RV103 (L-CH) and RV203 (R-CH) for 0.435V (-5 dB) reading.
3. Be sure that the reading is 0.435V (-5 dB) when changing the MONITOR switch from TAPE to SOURCE position and the pointer of VU meter stays at "0".
4. When TAPE SPEED switch is changed to 9.5 cm/s (3¾ ips) and 4.8 cm/s (1 7/8 ips), the readings of both L and R channels should be within 2 dB.

Adjustment Location:

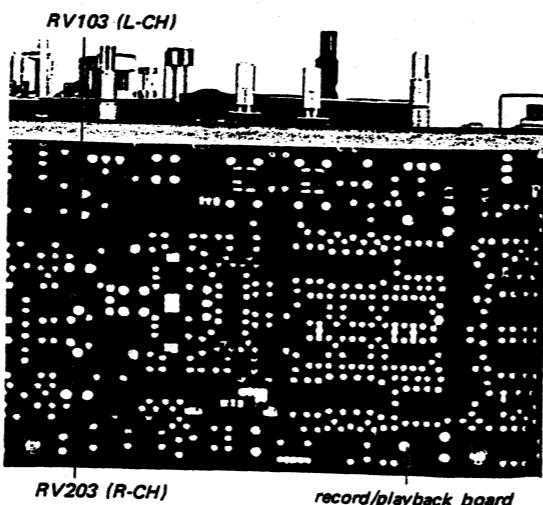


Dummy Coil Adjustment

Setting:

TAPE SELECT switch: NORMAL
TAPE SPEED selector: 19 cm/s (7½ ips)
MONITOR switch: TAPE


Procedure:

- Mode: standard record and simultaneous playback

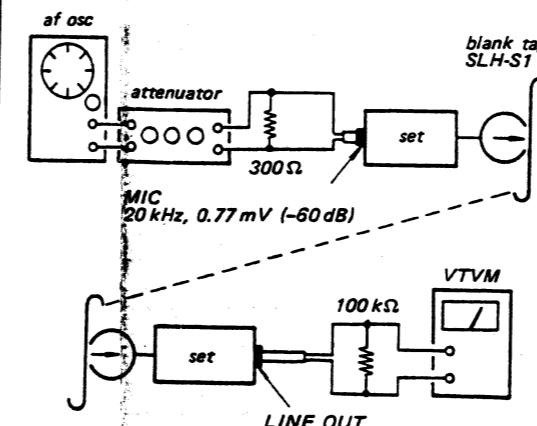

Step	Mode	Adjust	Remarks
1	stereo record and simultaneous playback	-	Memorize VTVM reading.
2	L channel record and simultaneous playback	L204	Same VTVM reading as in step 1.
3	R channel record and simultaneous playback	L104	

Adjustment Location:

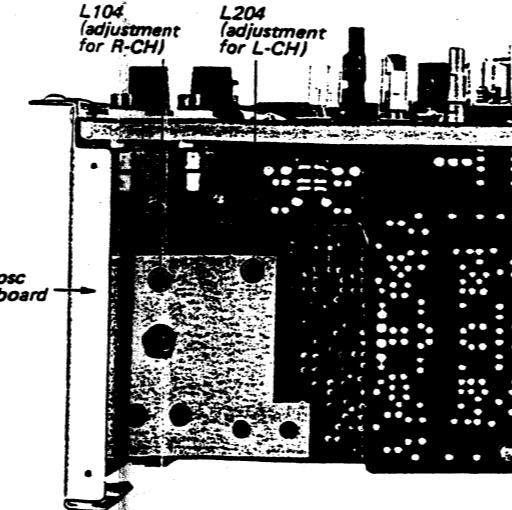


SECTION 4 DIAGRAMS

4-1. MOUNTING DIAGRAM


Replacement Semiconductors

For replacement, use semiconductors except in ().


Q101, 201
Q102, 202
Q106, 206 : 2SC1345
Q107, 207
Q109, 209
Q103-105
Q203-205
Q110, 210 : 2SC1345 (2SC458)
Q113, 213




Q114, 214
Q306 : 2SC1475 (2SC1318)




D101, 201, 305: 1T22AM (1T22)
D304, 306: 1S1555 (1T40)




Q302, 303: 2SC1345 (2SC1890)



Q108, 208
Q111, 211
Q112, 212 : 2SC1364 (2SC633A)
Q305


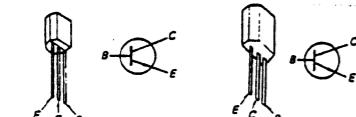


Q301: 2SK30 (2SK30A)

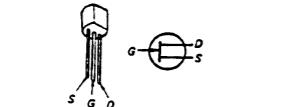


Note:

- : B+ pattern.
- : Signal Path
- : L-CH
- : R-CH
- DC resistance measurements are with coils connected on the circuit board, and are approximate.
- Color code of sleeving over the end of the jacket.

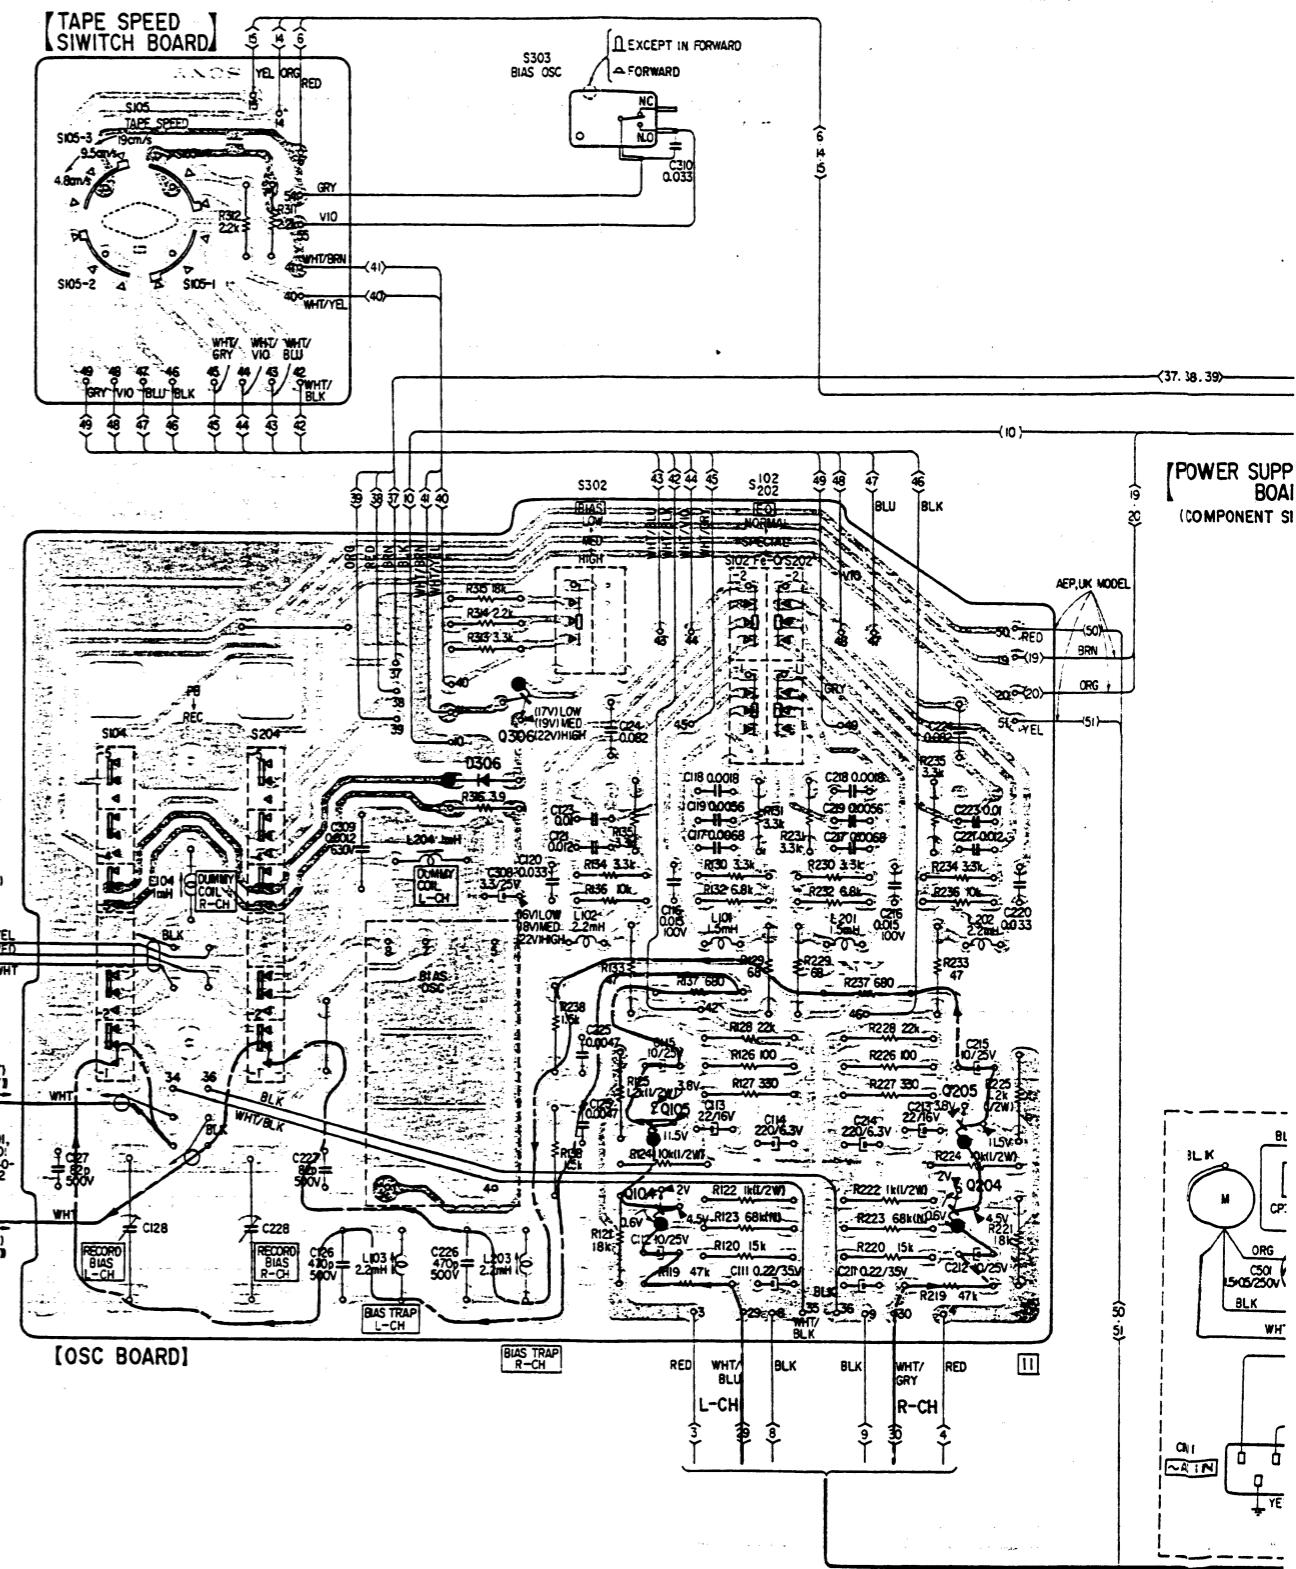



Q,IC	306	105	205
D	306	104	204

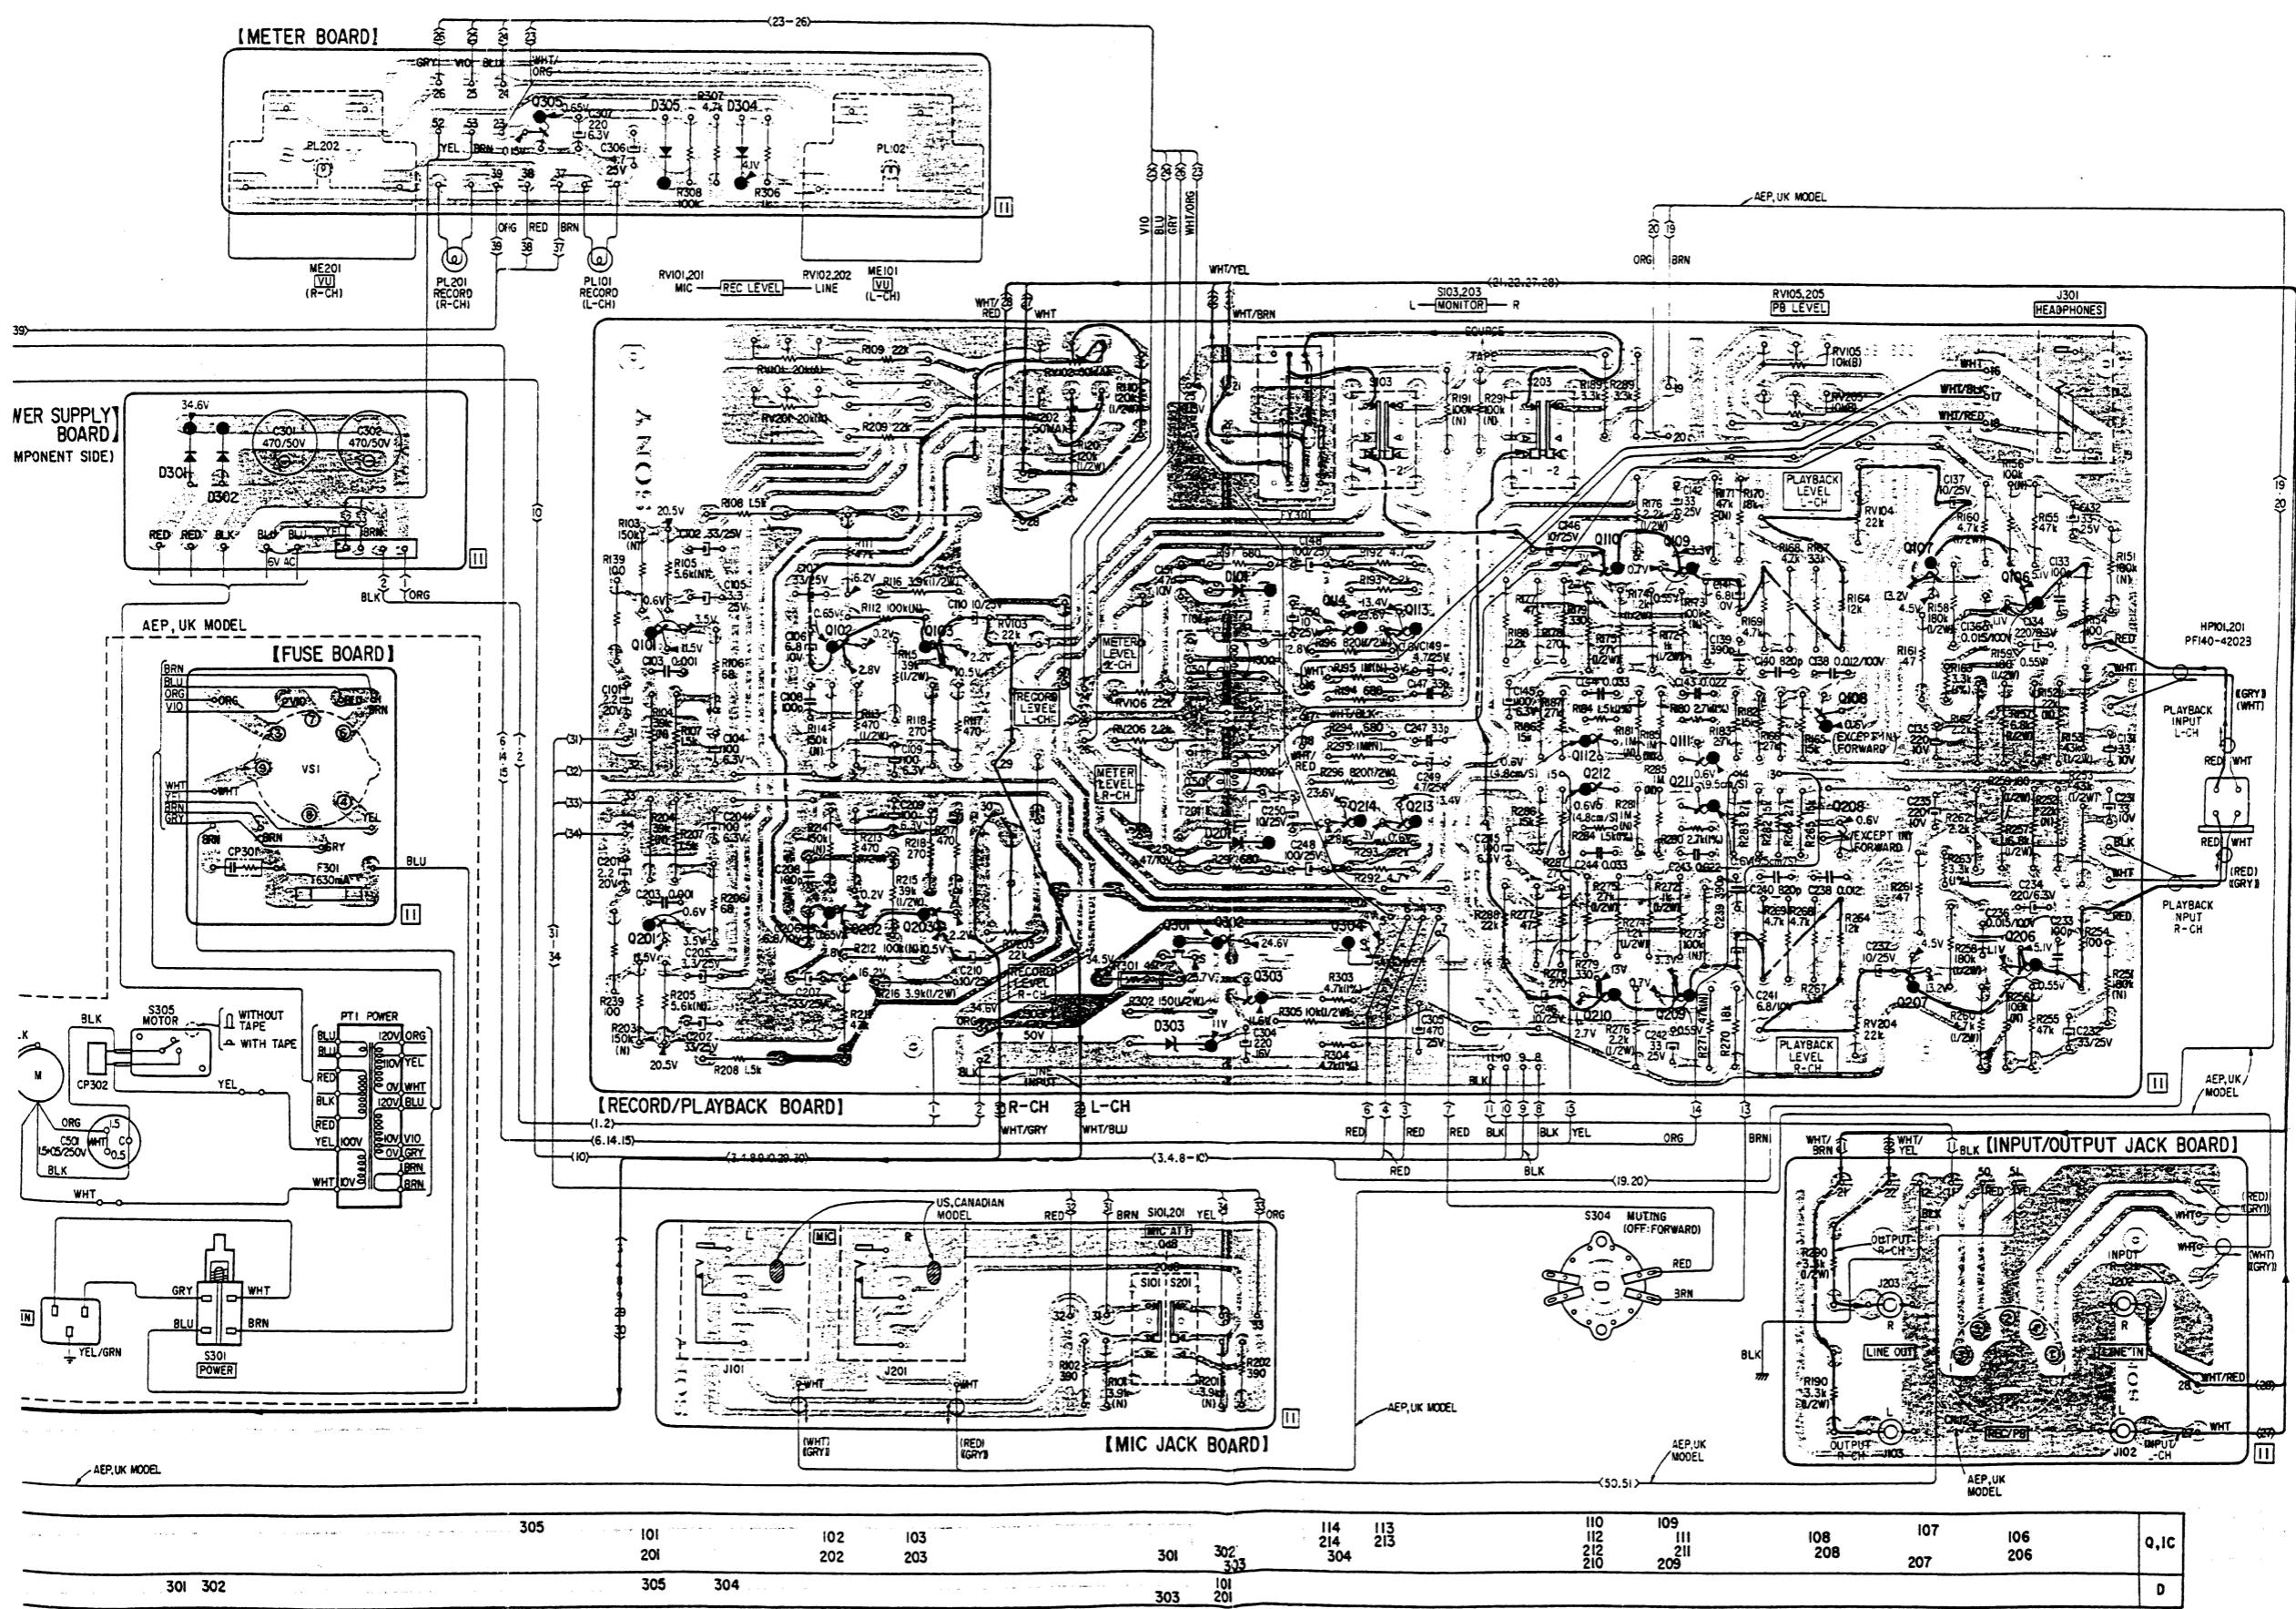

4-2. SCHEMATIC DIAGRAM

TC-399 TC-399

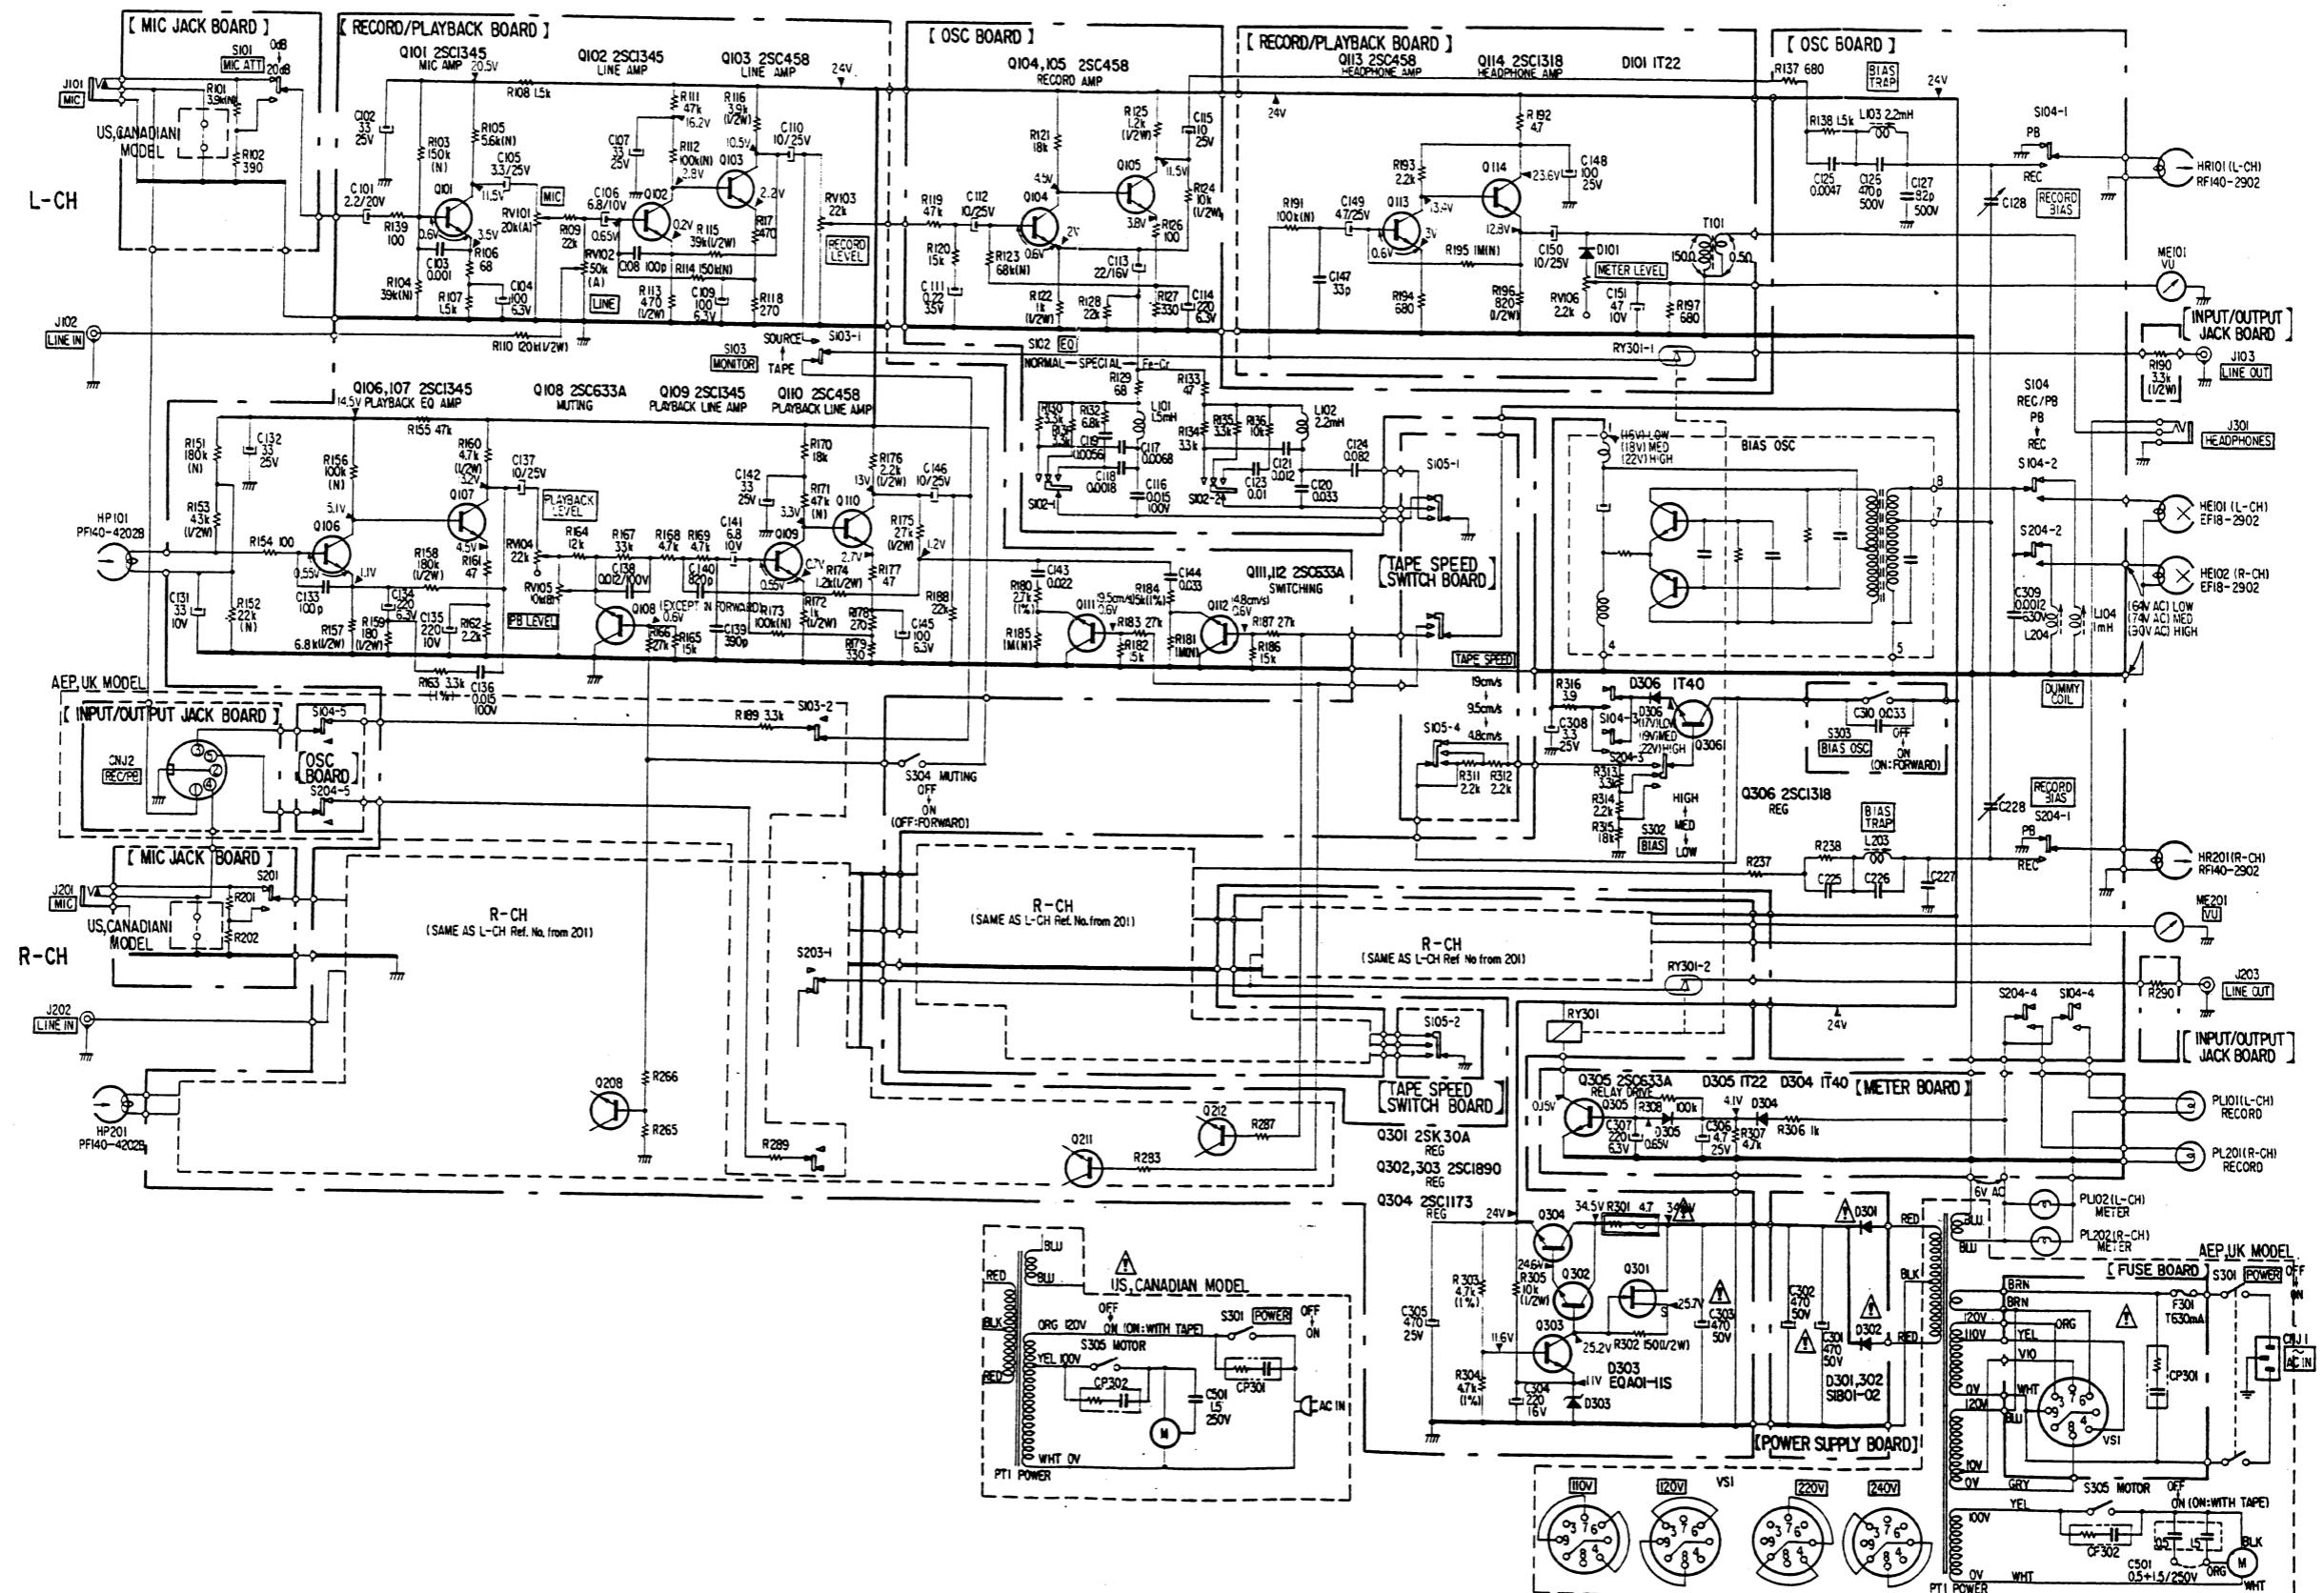

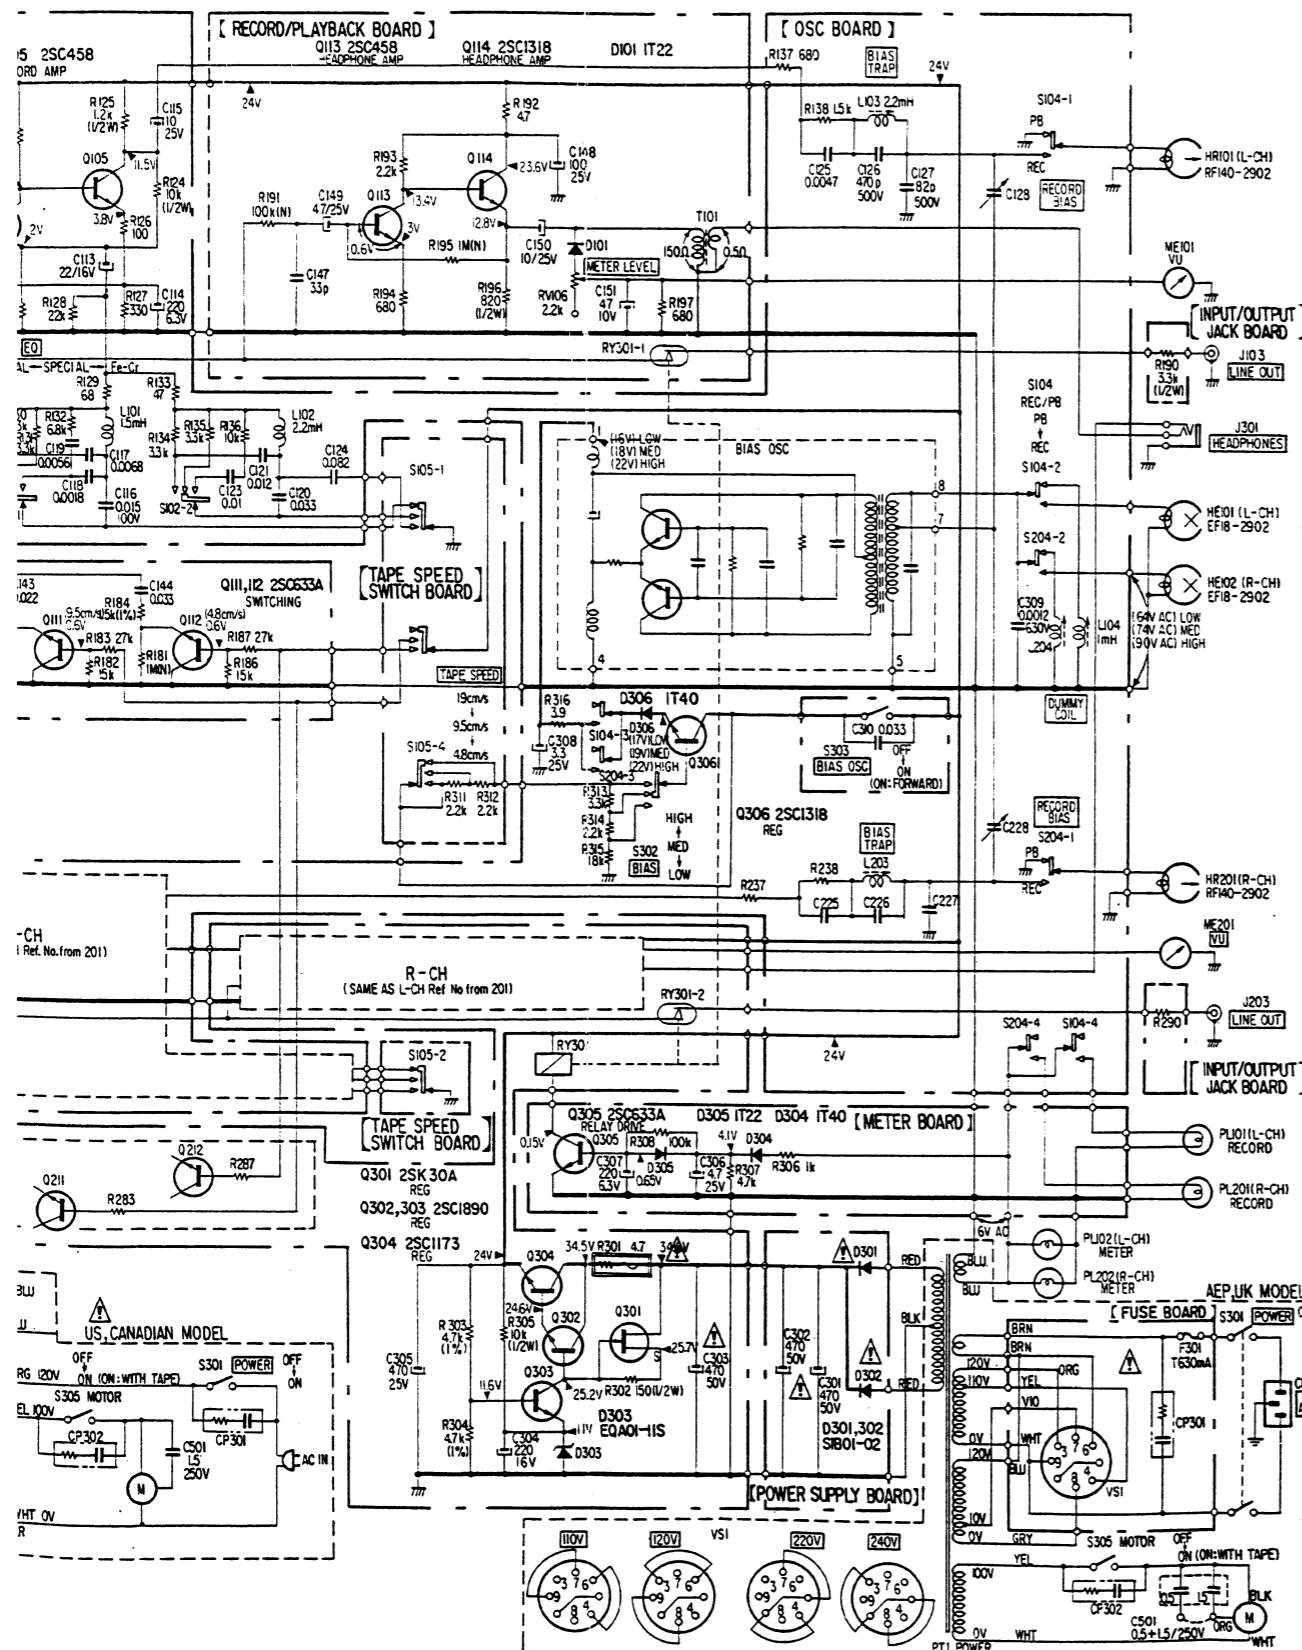

Note:

- Components for right channel have same values as for left channel. Reference numbers are coded from 201.
- All capacitors are in μF unless otherwise noted. $\text{pF} = \mu\mu\text{F}$
- 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{4}\text{W}$ unless otherwise noted.
 $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{k}\Omega$
- --- : fusible and nonflammable resistor.
- (N) : low-noise resistor.
- 1% indicates component tolerance.
- --- : B+ bus.
- $\boxed{\quad}$: panel designation.
- $\boxed{\quad}$: adjustment for repair.
- --- : direct connection to points marked --- on the chassis.
- Voltages are dc with respect to ground unless otherwise noted.
- Readings are taken in stop mode with a VOM (20 $\text{k}\Omega/\text{V}$).
() : record mode
- AC voltage readings in the bias oscillator circuit are taken with a VTVM.
- Transistor base-emitter voltages are measured on the 2.5V range.
- Voltage variations may be noted due to normal production tolerances.
- Switch

Ref. No.	Switch	Position
S101, 201	MIC ATT	0 dB
S102, 202	EQ	SPECIAL
S103, 203	MONITOR	TAPE
S104, 204	REC/PB	PB
S105, 205	TAPE SPEED	19 cm/s (7½ ips)
S301	POWER	OFF
S302	BIAS	MED
S303	BIAS OSC	OFF
S304	MUTING	OFF
S305	MOTOR	OFF


Note: The components identified by shading and Δ mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


TC-399 TC-399


**SECTION 5
EXPLODED VIEWS**

5-1.

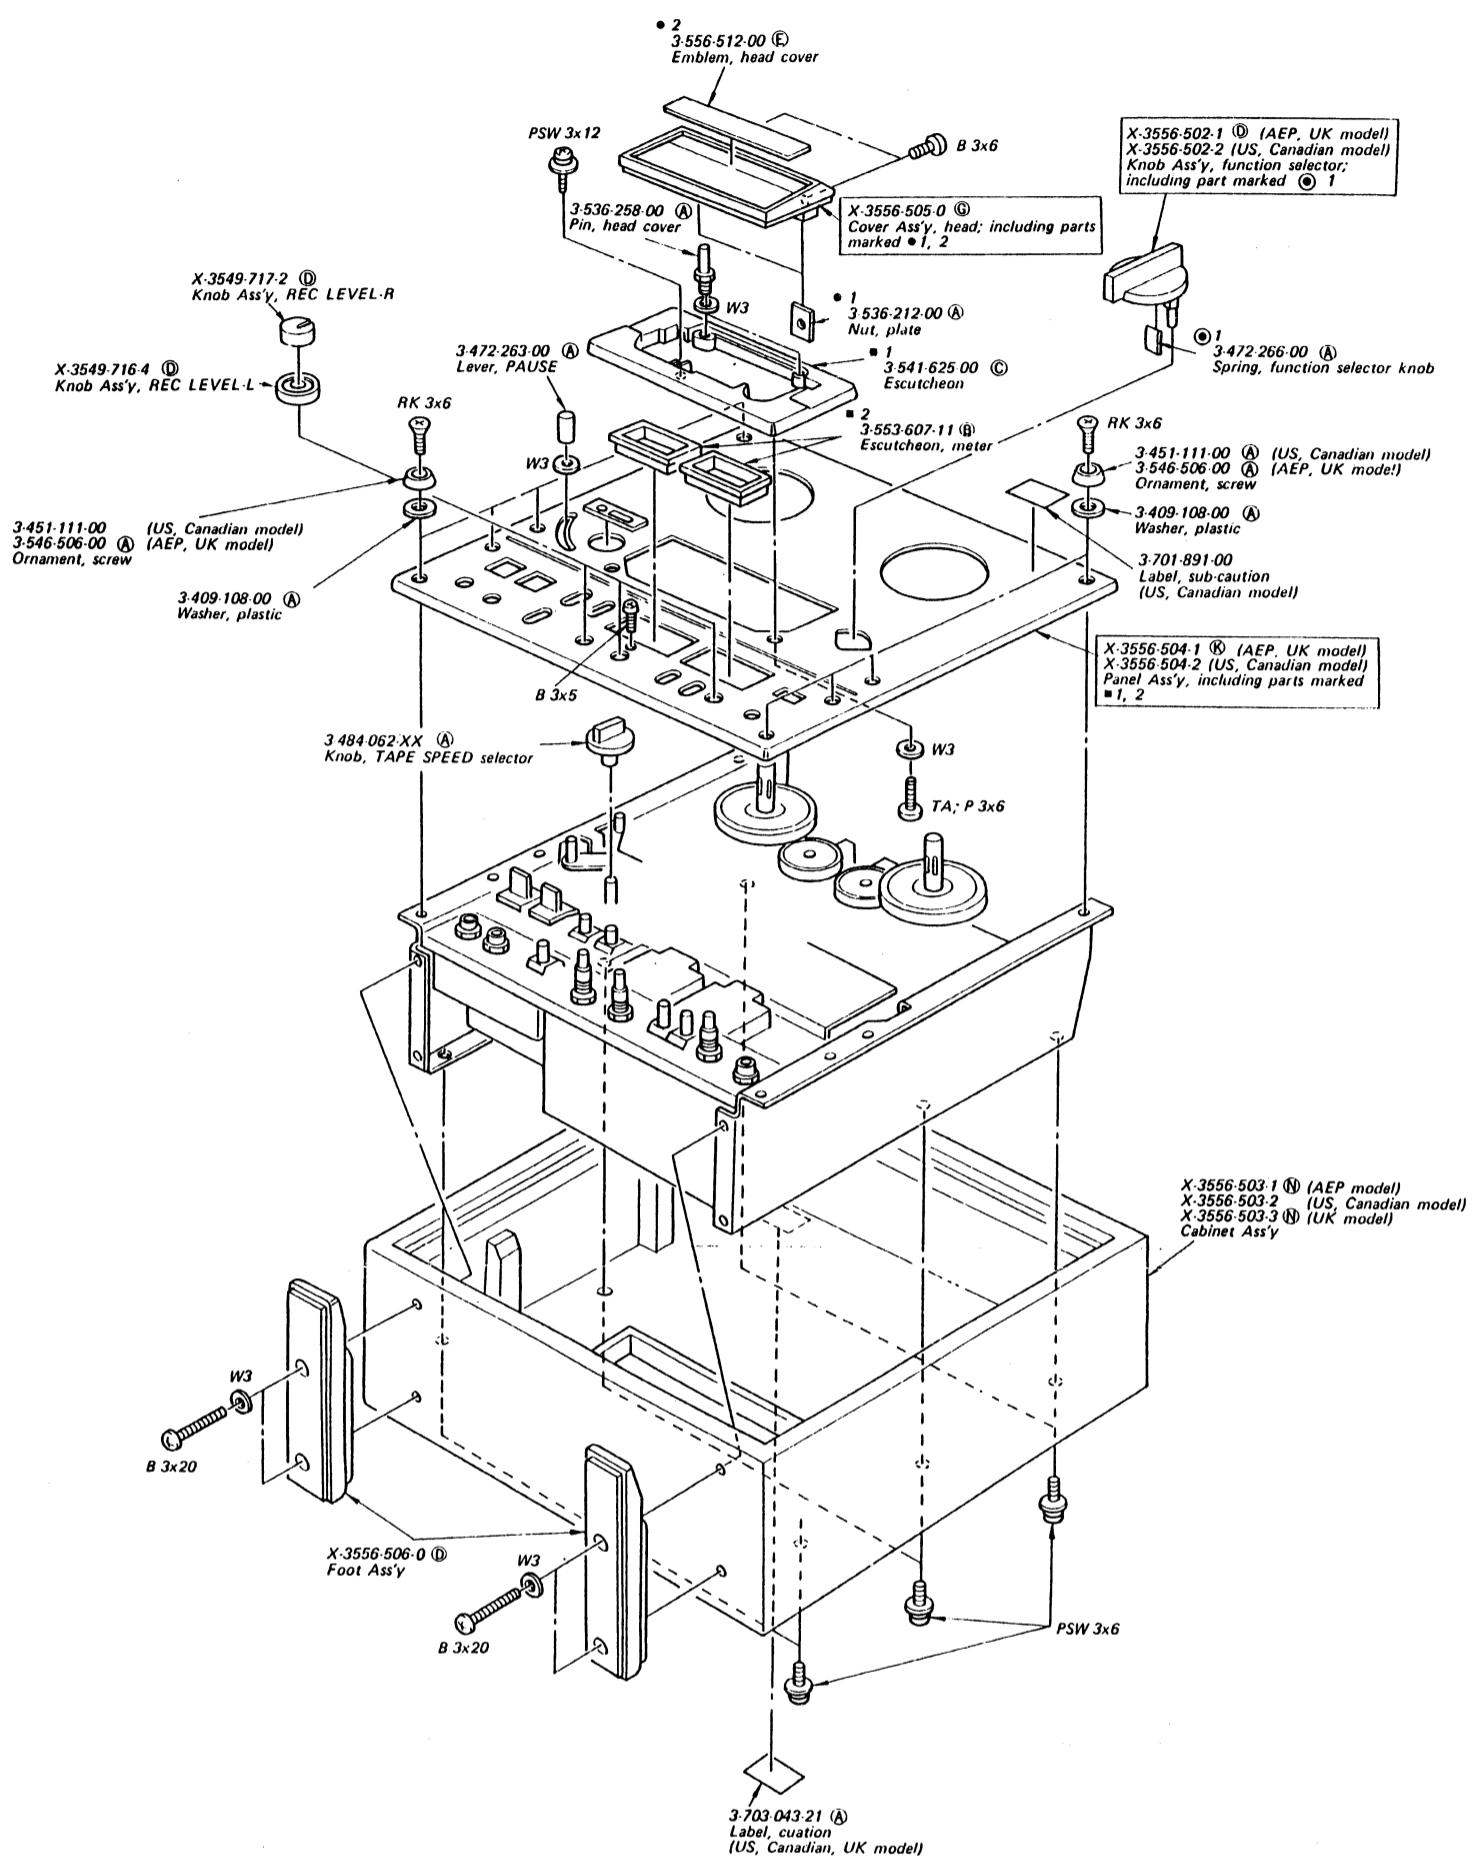1
— 33 —
2
3
4
5
6
— 34 —
7**Note:**


- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
- Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

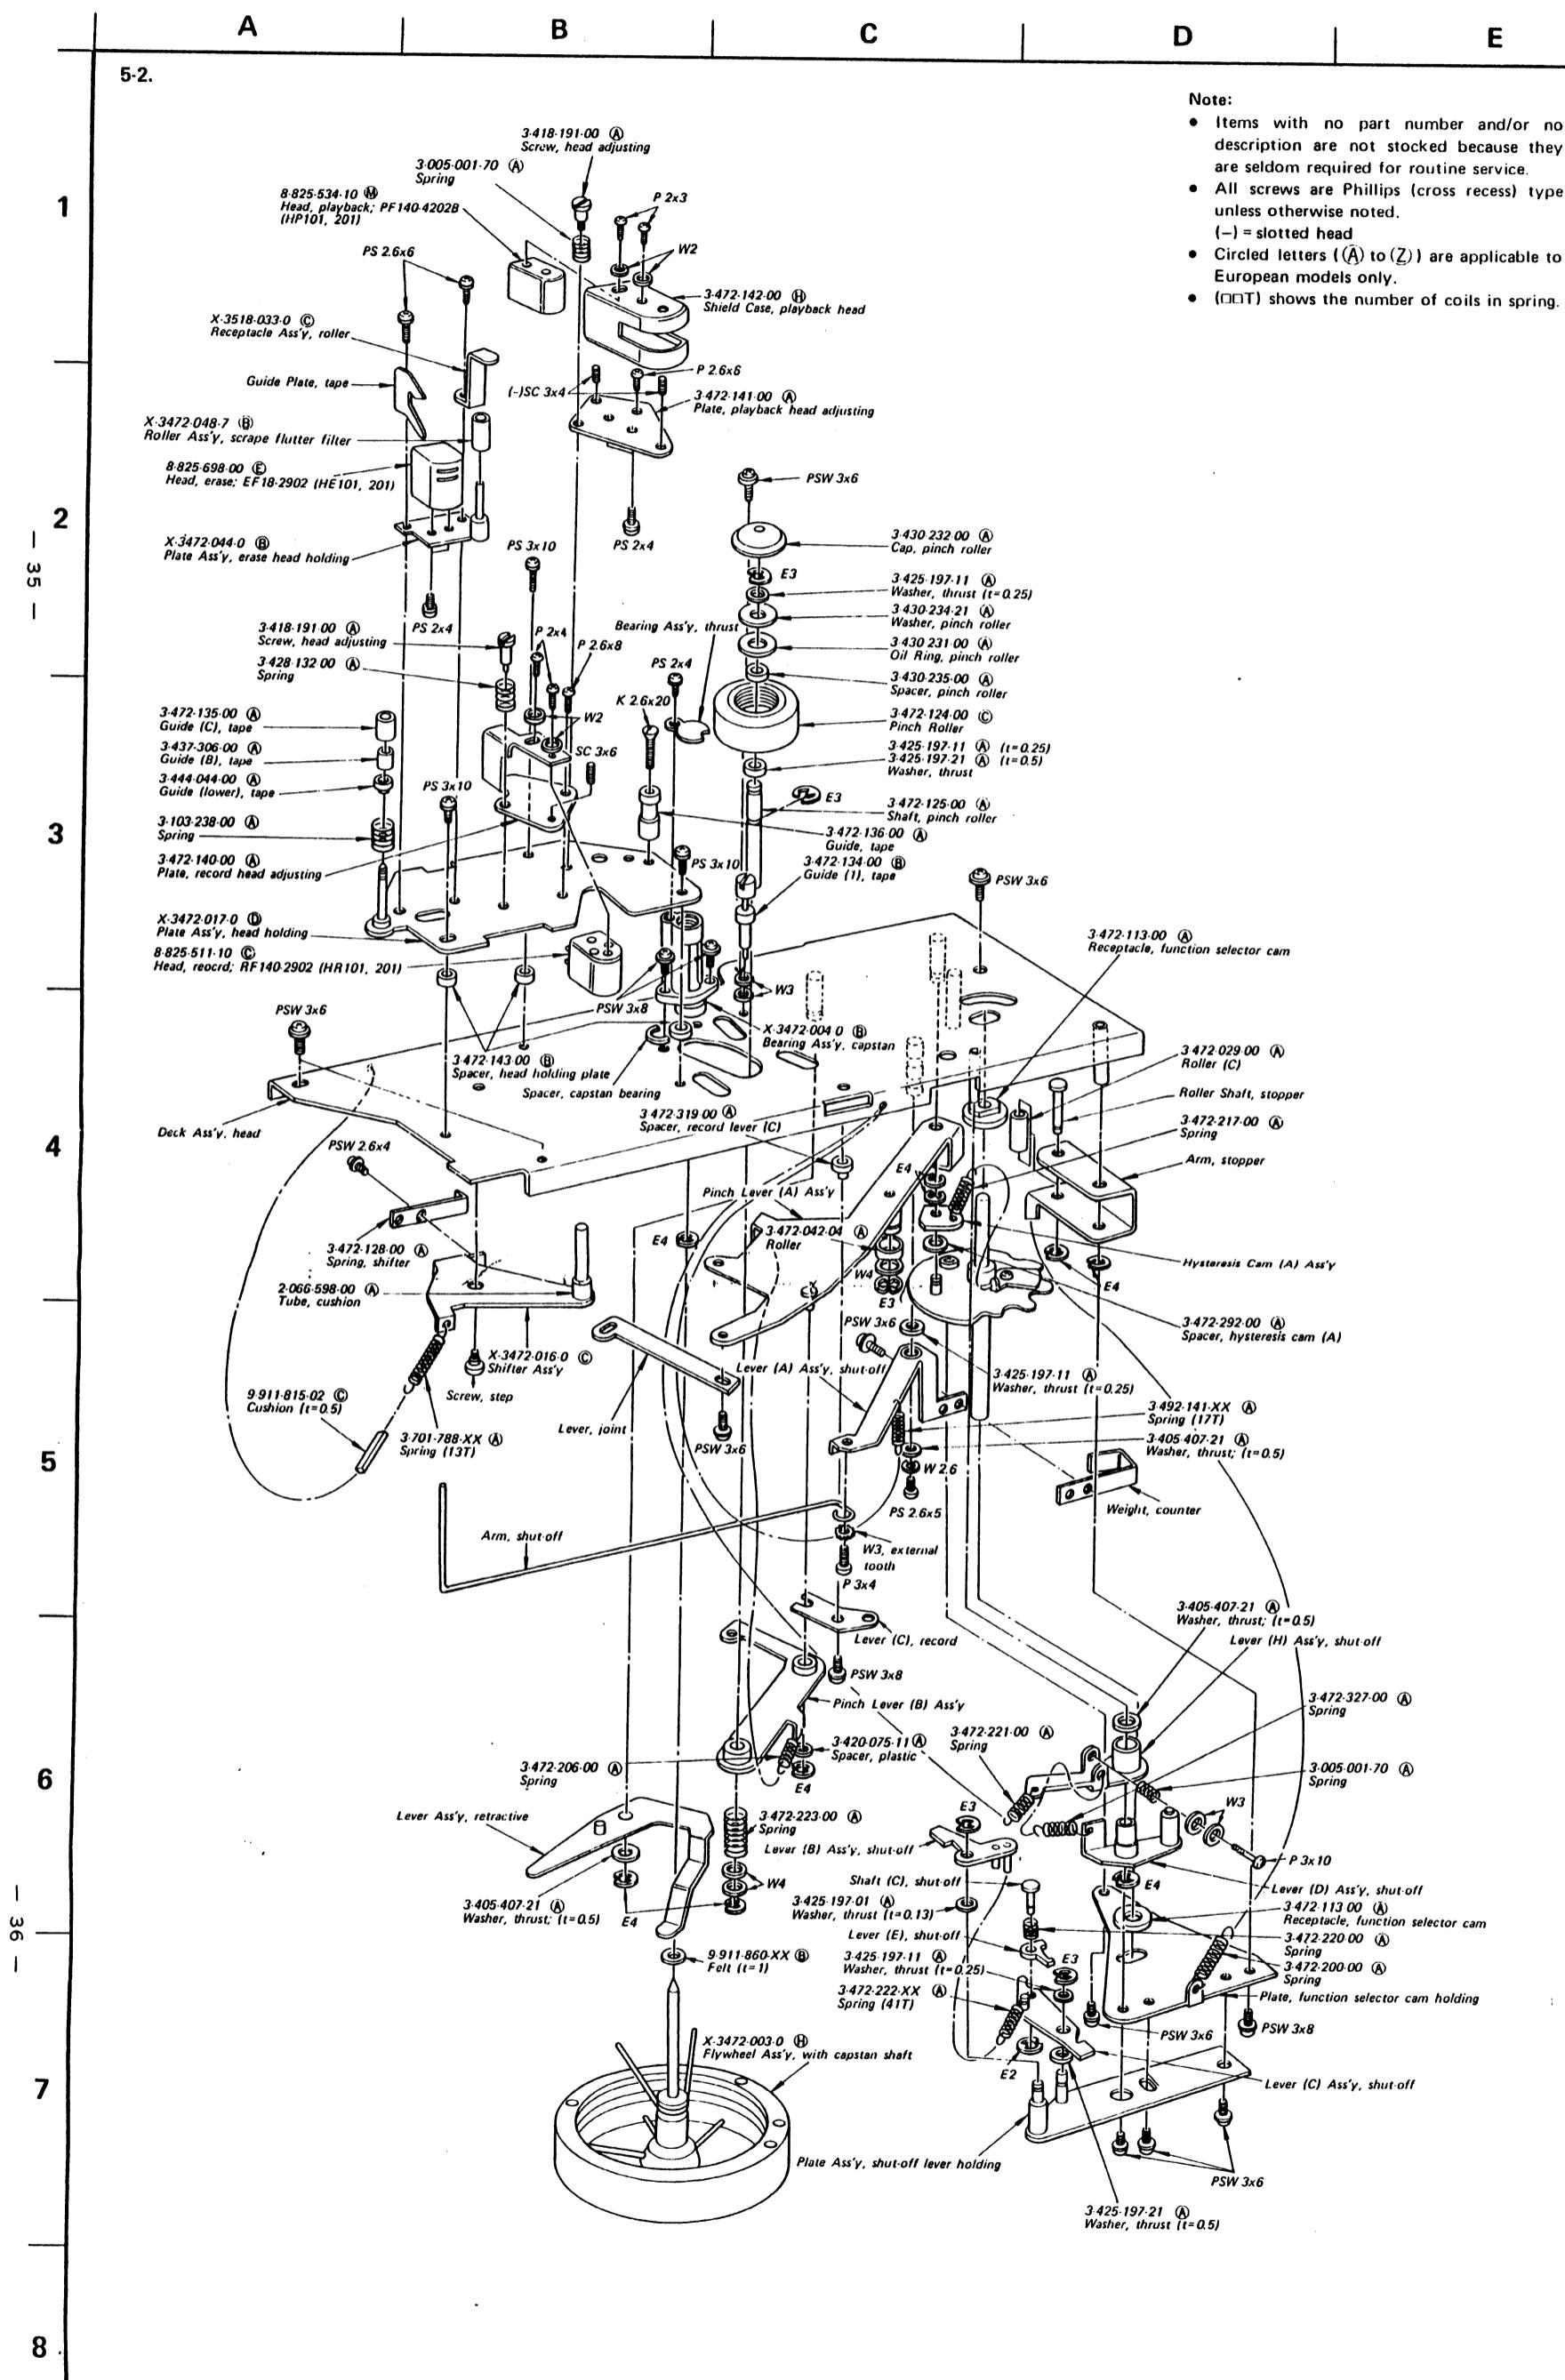

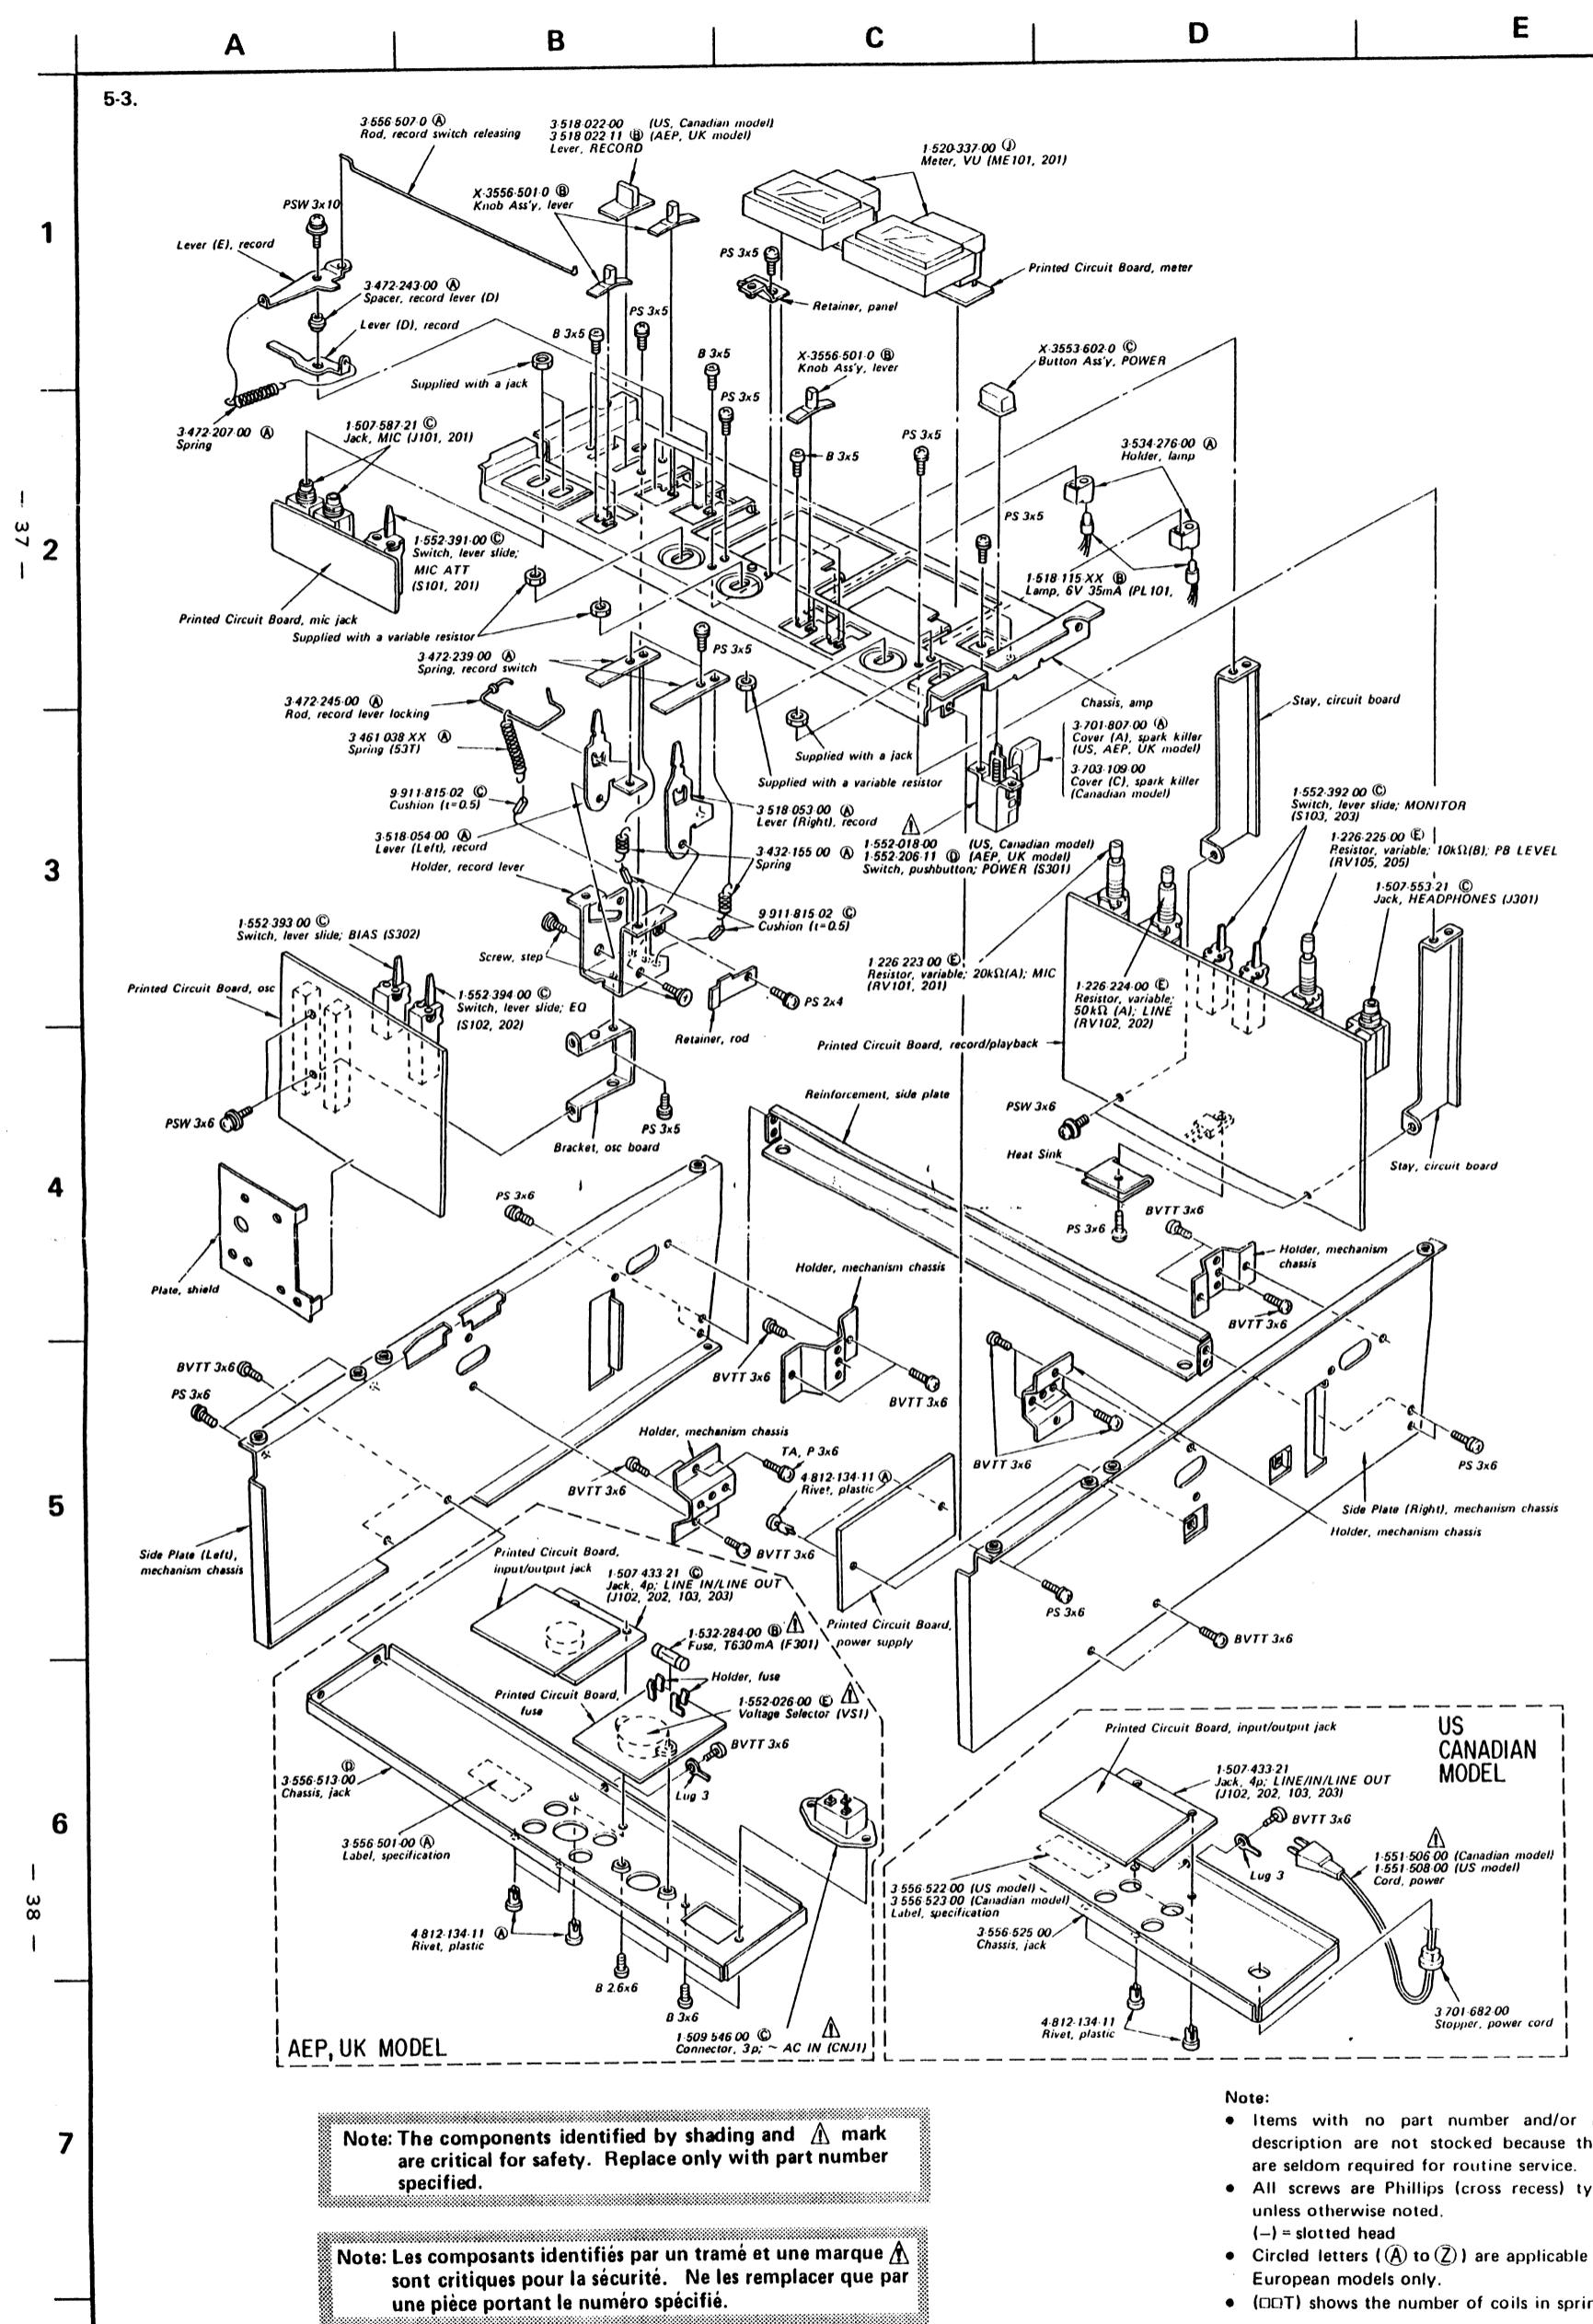


- Note:**
- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
 - All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
 - Circled letters (Ⓐ to Ⓛ) are applicable to European models only.
 - (□T) shows the number of coils in spring.

TC-399 TC-399

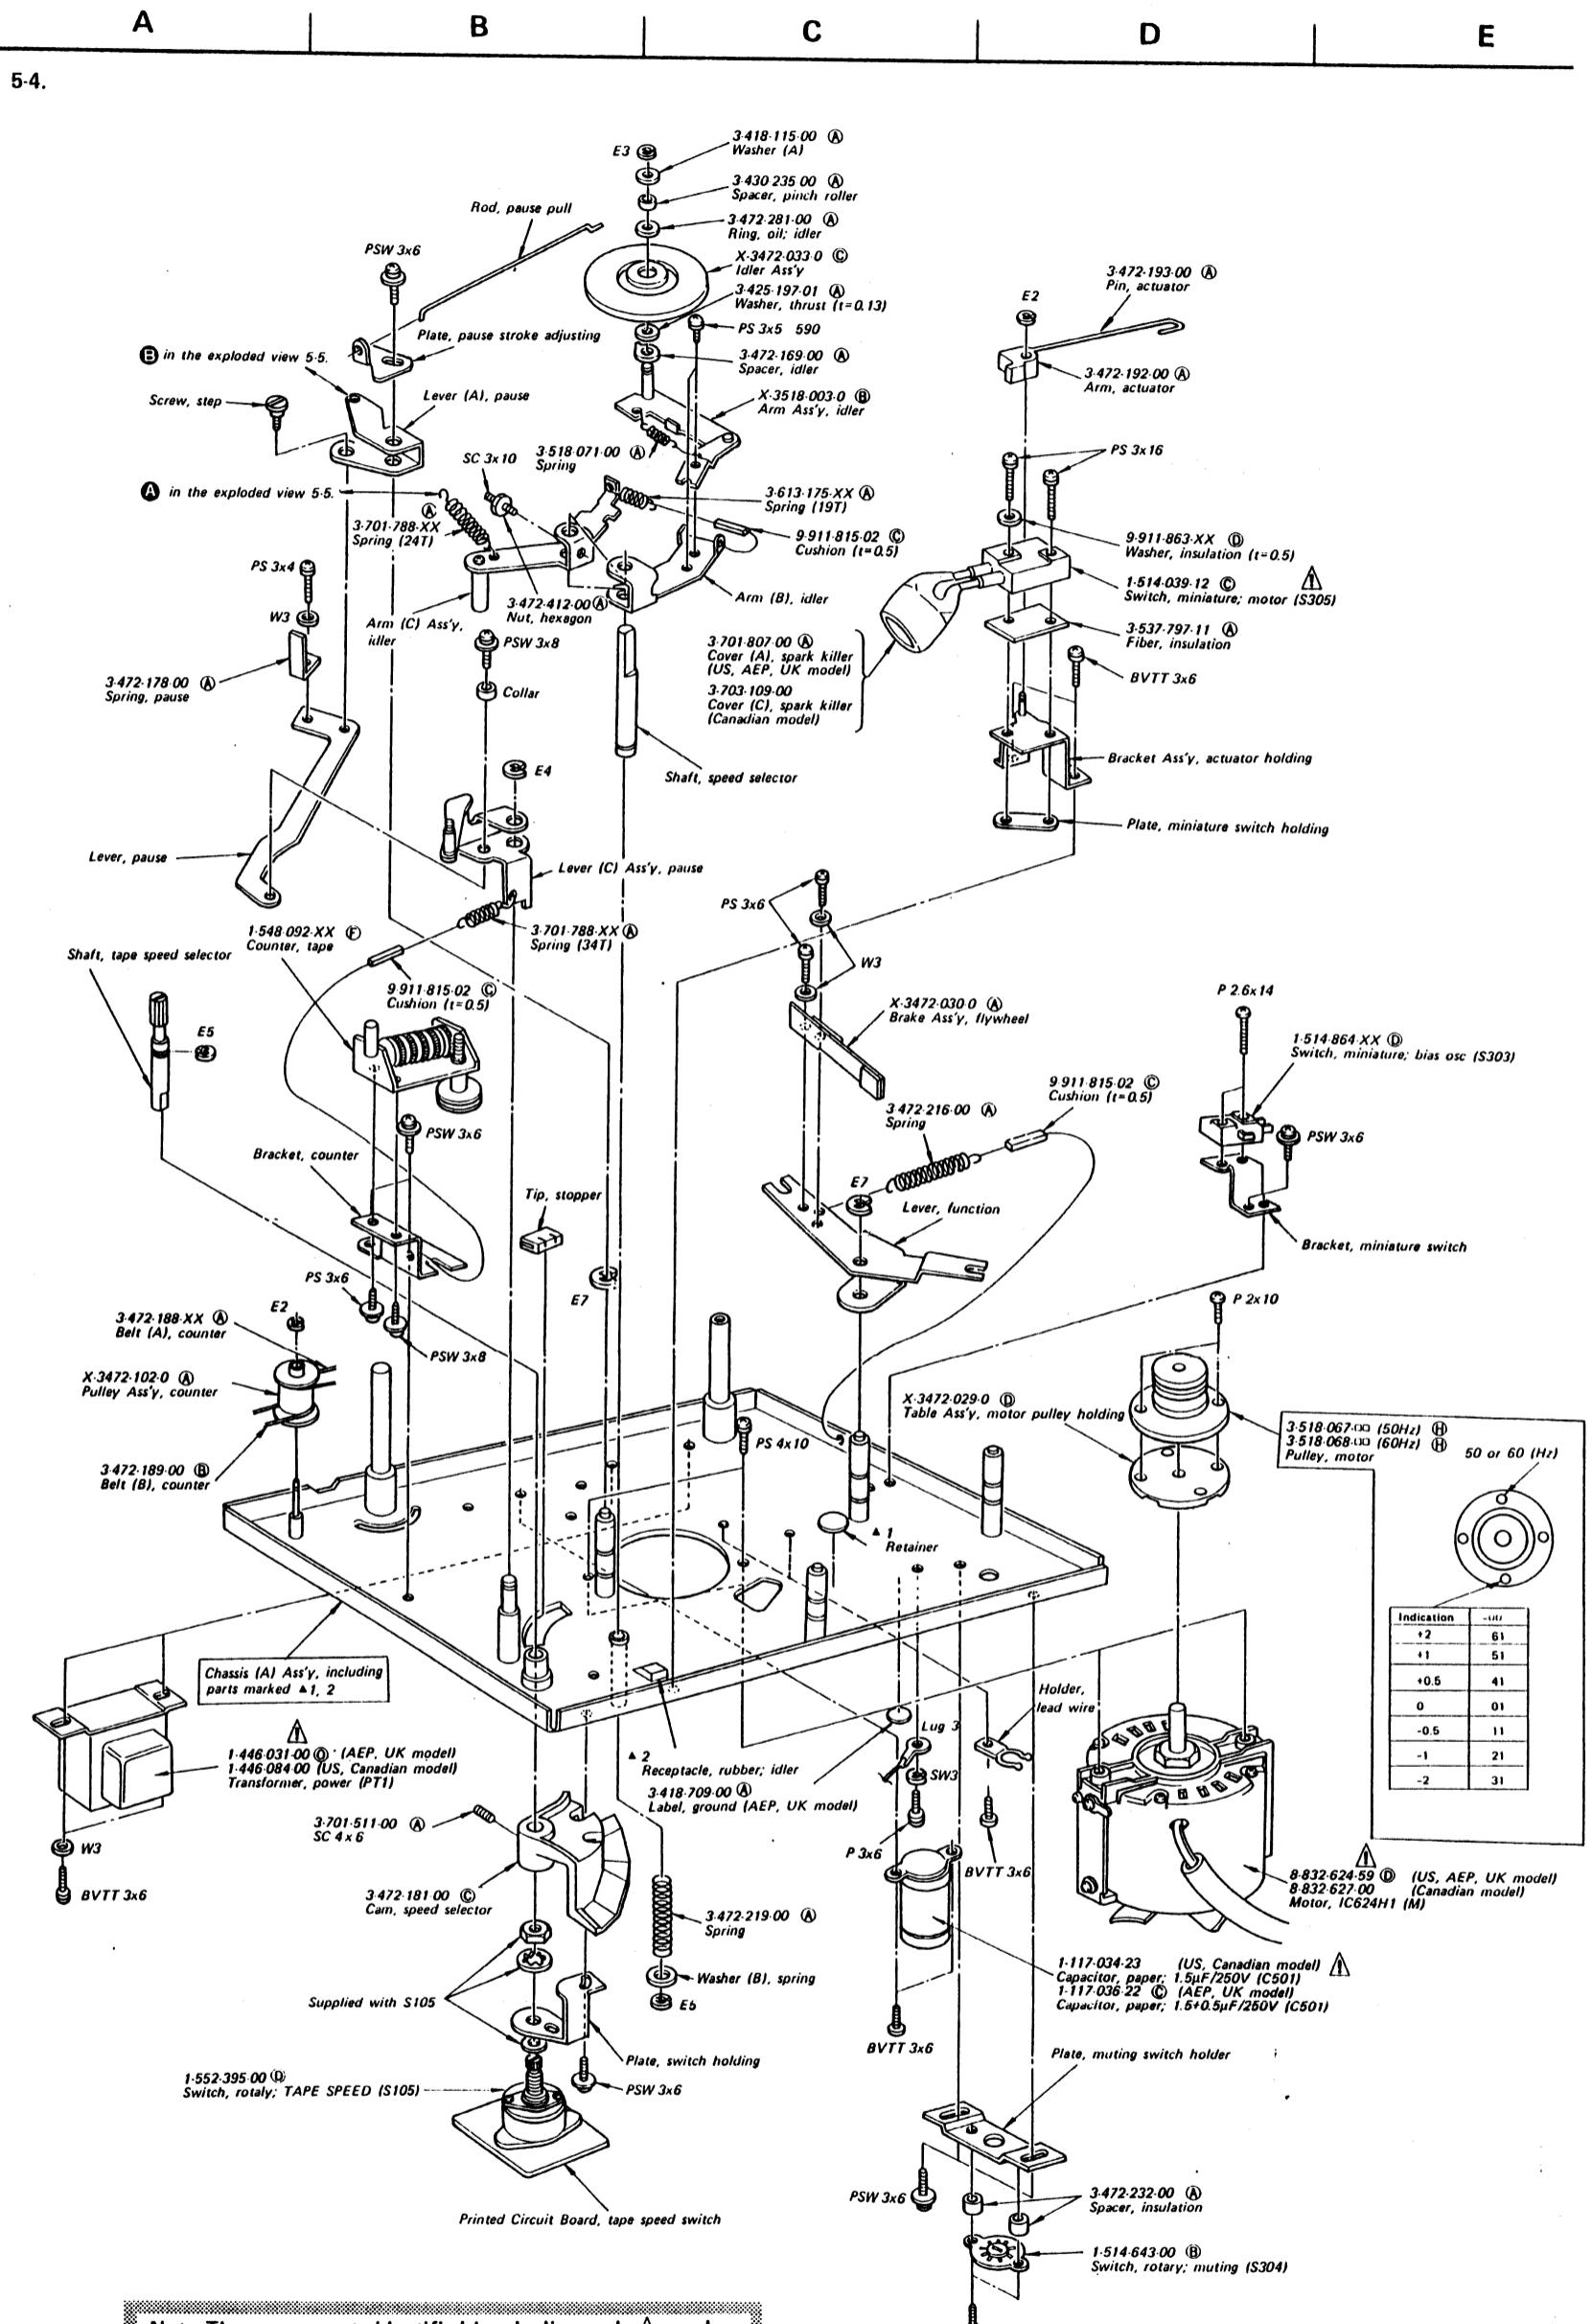

- Note:**
- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
 - All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
 - Circled letters (Ⓐ to Ⓛ) are applicable to European models only.
 - (□□T) shows the number of coils in spring.

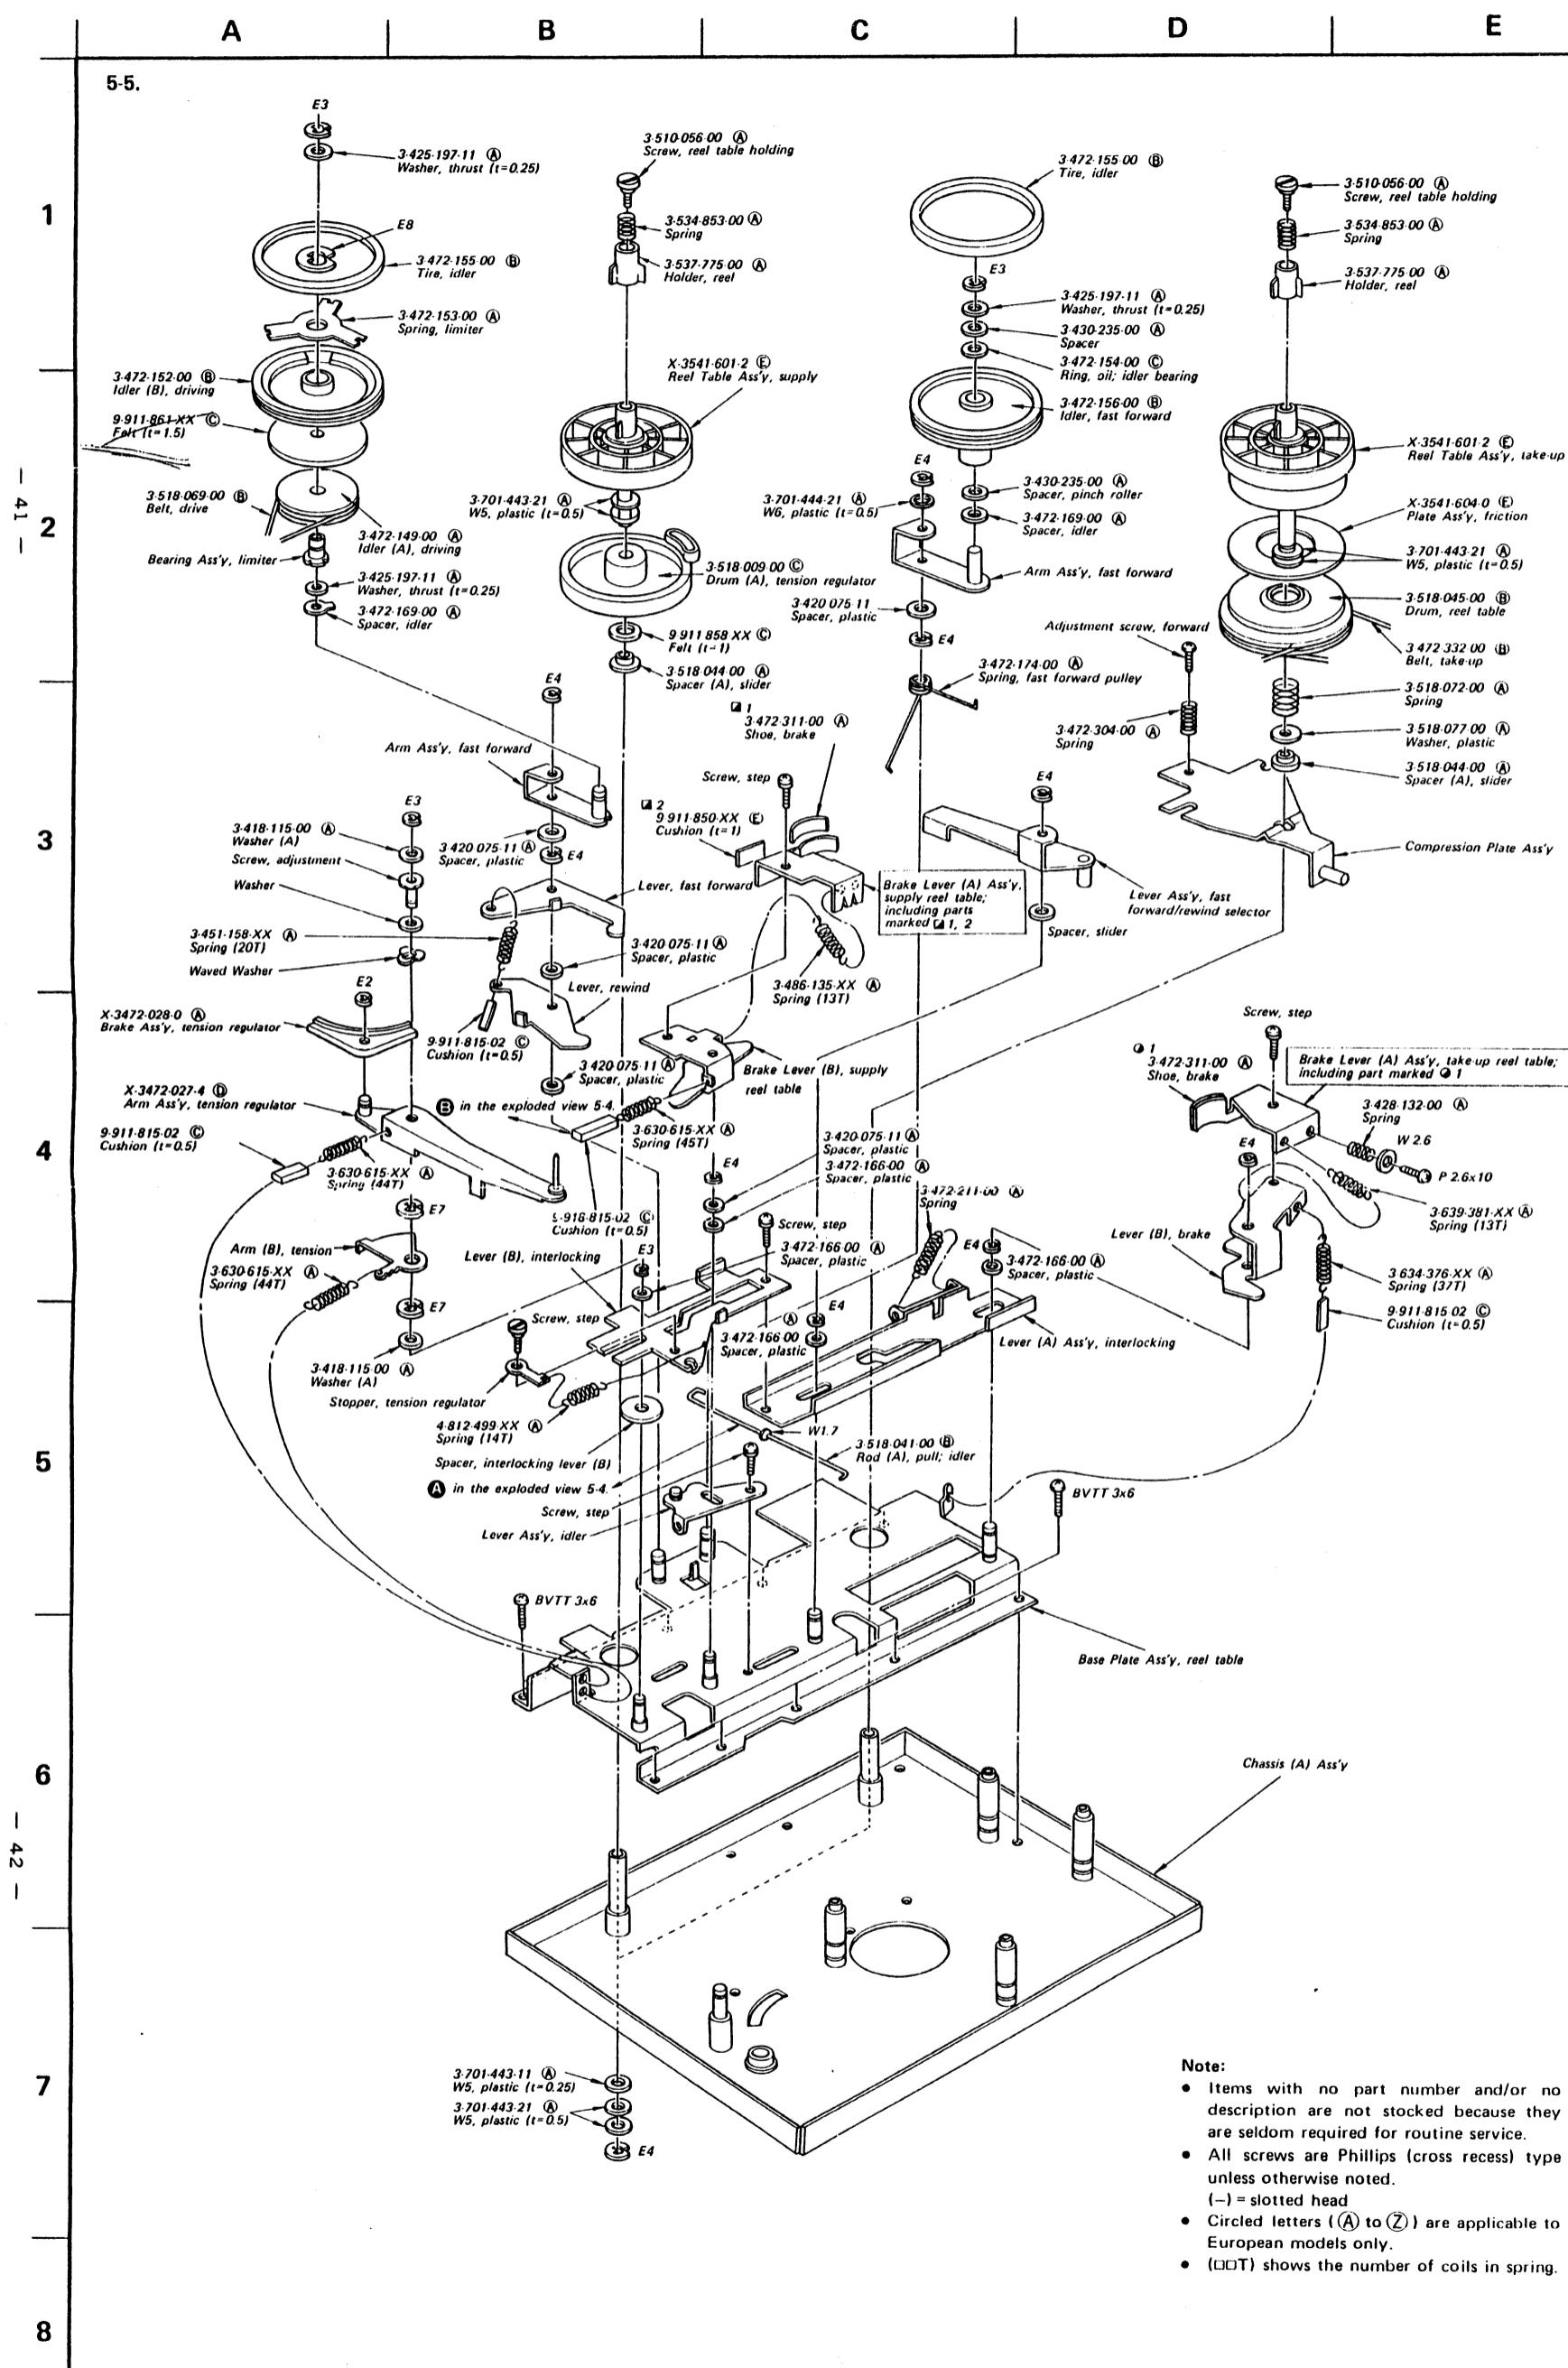

SECTION 6

ELECTRICAL PARTS LIST

Note: Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			
SEMICONDUCTORS								
Transistors								
Q101,201 Q102,202	8-729-334-58	Ⓑ 2SC1345	PT1	Ⓐ 1-446-031-00 1-446-084-00	Ⓐ Power (AEP, UK model) Power (US, Canadian model)			
⇒ Q103,203 ⇒ Q104,204	8-729-334-58	Ⓑ 2SC1345	T101,201	1-427-424-11	Ⓒ Output			
⇒ Q105,205								
CAPACITORS								
Q106,206 Q107,207	8-729-334-58	Ⓑ 2SC1345	All capacitors are in μF and ceramic unless otherwise noted. 50WV or less are not indicated except for electrolytics. p = $\mu\mu\text{F}$, elect = electrolytic					
⇒ Q108,208	8-729-663-47	Ⓑ 2SC1364	C101,201	1-131-196-11	Ⓑ 2.2	20V	tantalum	
Q109,209	8-729-334-58	Ⓑ 2SC1345	C102,202	1-121-404-11	Ⓐ 33	25V	elect	
⇒ Q110,210	8-729-334-58	Ⓑ 2SC1345	C103,203	1-102-074-11	Ⓐ 0.001			
⇒ Q111,211	8-729-663-47	Ⓑ 2SC1364	C104,204	1-121-413-11	Ⓐ 100	6.3V	elect	
⇒ Q112,212			C105,205	1-121-392-11	Ⓐ 3.3	25V	elect	
⇒ Q113,213	8-729-334-58	Ⓑ 2SC1345	C106,206	1-131-230-11	Ⓑ 6.8	10V	tantalum	
⇒ Q114,214	8-760-413-10	Ⓒ 2SC1475	C107,207	1-121-404-11	Ⓐ 33	25V	elect	
⇒ Q301	8-729-203-04	Ⓑ 2SK30	C108,208	1-102-975-11	Ⓐ 100p			
⇒ Q302,303	8-729-334-58	Ⓑ 2SC1345	C109,209	1-121-413-11	Ⓐ 100	6.3V	elect	
Q304	8-729-217-33	Ⓒ 2SC1173	C110,210	1-121-398-11	Ⓐ 10	25V	elect	
⇒ Q305	8-729-663-47	Ⓑ 2SC1364	C111,211	1-131-211-11	Ⓑ 0.22	35V	tantalum	
⇒ Q306	8-760-413-10	Ⓒ 2SC1475	C112,212	1-121-398-11	Ⓐ 10	25V	elect	
Diodes								
⇒ D101,201	8-719-422-21	Ⓐ IT22AM	C113,213	1-121-479-11	Ⓐ 22	16V	elect	
⇒ D301,302	Ⓐ 8-719-200-02	Ⓑ 10E2	C114,214	1-121-419-11	Ⓐ 220	6.3V	elect	
⇒ D303	8-719-111-07	Ⓑ RD11E	C115,215	1-121-398-11	Ⓐ 10	25V	elect	
⇒ D304	8-719-815-55	Ⓑ LS1555	C116,216	1-129-927-11	Ⓑ 0.015	100V	Polyethylene	
⇒ D305	8-719-422-21	Ⓐ IT22AM	C117,217	1-108-575-12	Ⓐ 0.0068		mylar	
⇒ D306	8-719-815-55	Ⓑ LS1555	C118,218	1-108-561-12	Ⓐ 0.0018		mylar	
COILS								
L101,201	1-407-213-XX	Ⓐ 1.5 mH	C119,219	1-108-573-12	Ⓐ 0.0056		mylar	
L102,202	1-407-198-XX	Ⓐ 2.2 mH	C120,220	1-108-591-12	Ⓐ 0.033		mylar	
L103,203	1-407-286-00	Ⓑ 2.2 mH, adjustable	C121,221	1-108-581-12	Ⓐ 0.012		mylar	
L104,204	1-407-284-00	Ⓑ 1 mH, adjustable	C123,223	1-108-579-12	Ⓐ 0.01		mylar	
			C124,224	1-108-601-12	Ⓑ 0.082		mylar	
			C125,225	1-108-571-12	Ⓐ 0.0047		mylar	
			C126,226	1-107-185-11	Ⓐ 470p	500V	mica	
			C127,227	1-107-037-11	Ⓐ 82p	500V	mica	
			C128,228	1-141-010-XX	Ⓑ		trimmer	

⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: The components identified by shading and Ⓛ mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque Ⓛ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Note: Circled letters (Ⓐ to Ⓛ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>			<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		
C131,231	1-131-195-11	Ⓐ 33	10V	elect	R110,210	1-244-923-11	Ⓐ 120 k	½W	carbon
C132,232	1-121-404-11	Ⓐ 33	25V	elect	R113,213	1-244-865-11	Ⓐ 470	½W	carbon
C133,233	1-102-975-11	Ⓐ 100p			R115,215	1-244-911-11	Ⓐ 39 k	½W	carbon
C134,234	1-121-419-11	Ⓐ 220	6.3V	elect	R116,216	1-244-887-11	Ⓐ 3.9 k	½W	carbon
C135,235	1-121-420-11	Ⓐ 220	10V	elect	R122,222	1-244-873-11	Ⓐ 1k	½W	carbon
C136,236	1-129-927-11	Ⓑ 0.015	100V	Polyethylene	R124,224	1-244-897-11	Ⓐ 10 k	½W	carbon
C137,237	1-121-398-11	Ⓐ 10	25V	elect	R125,225	1-244-875-11	Ⓐ 1.2 k	½W	carbon
C138,238	1-129-896-11	Ⓐ 0.012	100V	Polyethylene	R153,253	1-244-912-11	Ⓐ 43 k	½W	carbon
C139,239	1-102-113-11	Ⓐ 390p			R157,257	1-244-893-11	Ⓐ 6.8 k	½W	carbon
C140,240	1-102-117-11	Ⓐ 820p			R158,258	1-244-927-11	Ⓐ 180 k	½W	carbon
C141,241	1-131-230-11	Ⓑ 6.3	10V	Tantalum	R159,259	1-244-855-11	Ⓐ 180	½W	carbon
C142,242	1-121-404-11	Ⓐ 33	25V	elect	R160,260	1-244-889-11	Ⓐ 4.7 k	½W	carbon
C143,243	1-108-587-12	Ⓐ 0.022		Mylar	R163,263	1-214-144-11	Ⓐ 3.3 k	¼W	metal oxide (1%)
C144,244	1-108-591-12	Ⓐ 0.033		Mylar	R172,272	1-244-873-11	Ⓐ 1 k	½W	carbon
C145,245	1-121-413-11	Ⓐ 100	6.3V	elect	R174,274	1-244-875-11	Ⓐ 1.2 k	½W	carbon
C146,246	1-121-398-11	Ⓐ 10	25V	elect	R175,275	1-244-907-11	Ⓐ 27 k	½W	carbon
C147,247	1-102-969-11	Ⓒ 33p			R176,276	1-244-881-11	Ⓐ 2.2 k	½W	carbon
C148,248	1-121-416-11	Ⓐ 100	25V	elect	R180,280	1-214-142-11	Ⓐ 2.7 k	½W	metal oxide (1%)
C149,249	1-121-395-11	Ⓐ 4.7	25V	elect	R184,284	1-214-136-11	Ⓐ 1.5 k	½W	metal oxide (1%)
C150,250	1-121-398-11	Ⓐ 10	25V	elect	R190,290	1-244-885-11	Ⓐ 3.3 k	½W	carbon
C151,251	1-121-352-11	Ⓐ 47	10V	elect	R196,296	1-244-871-11	Ⓐ 820	½W	carbon
C301-303 Ⓚ	1-121-810-11	Ⓑ 470	50V	elect	R301	Ⓐ 1-217-383-11	Ⓑ 4.7	¼W	fusible (nonflammable)
C304	1-121-421-11	Ⓑ 220	16V	elect	R302	1-244-853-11	Ⓐ 150	½W	carbon
C305	1-121-733-11	Ⓑ 470	25V	elect	R303,304	1-214-148-11	Ⓐ 4.7 k	½W	metal oxide (1%)
C306	1-121-961-11	Ⓐ 4.7	25V	elect	R305	1-244-897-11	Ⓐ 10 k	½W	carbon
C307	1-121-981-11	Ⓑ 220	6.3V	elect	RV101,201	1-226-223-00	Ⓔ 20 k (A), variable; MIC		
C308	1-121-392-11	Ⓐ 3.3	25V	elect	RV102,202	1-226-224-00	Ⓔ 50 k (A), variable; LINE		
C309	1-129-703-11	Ⓑ 0.0012	630V	Polyethylene	RV103,203	1-224-646-XX	Ⓐ 22 k, adjustable; RECORD LEVEL		
C310	1-108-244-12	Ⓐ 0.033		Mylar	RV104,204	1-224-646-XX	Ⓐ 22 k, adjustable; PLAYBACK LEVEL		
C501	Ⓐ 1-117-034-23	1.5	250V	Paper (US, Canadian model)	RV105,205	1-226-225-00	Ⓐ 10 k, variable; PB LEVEL		
C501	Ⓐ 1-117-036-22	Ⓒ 1.5+0.5	250V	Paper (AEP, UK model)	RV106,206	1-224-643-XX	Ⓐ 2.2 k, adjustable; METER LEVEL		

Note: The components identified by shading and Ⓚ mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque Ⓚ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


1/4 WATT CARBON RESISTORS (A)

Note: Circled letter (A) is applicable to European model only.

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-244-601-11	10	1-244-625-11	100	1-244-649-11	1.0k	1-244-673-11	10k	1-244-697-11	100k	1-244-721-11	1.0M	1-244-745-11
1.1	1-244-602-11	11	1-244-626-11	110	1-244-650-11	1.1k	1-244-674-11	11k	1-244-698-11	110k	1-244-722-11	1.1M	1-244-746-11
1.2	1-244-603-11	12	1-244-627-11	120	1-244-651-11	1.2k	1-244-675-11	12k	1-244-699-11	120k	1-244-723-11	1.2M	1-244-747-11
1.3	1-244-604-11	13	1-244-628-11	130	1-244-652-11	1.3k	1-244-676-11	13k	1-244-700-11	130k	1-244-724-11	1.3M	1-244-748-11
1.5	1-244-605-11	15	1-244-629-11	150	1-244-653-11	1.5k	1-244-677-11	15k	1-244-701-11	150k	1-244-725-11	1.5M	1-244-749-11
1.6	1-244-606-11	16	1-244-630-11	160	1-244-654-11	1.6k	1-244-678-11	16k	1-244-702-11	160k	1-244-726-11	1.6M	1-244-750-11
1.8	1-244-607-11	18	1-244-631-11	180	1-244-655-11	1.8k	1-244-679-11	18k	1-244-703-11	180k	1-244-737-11	1.8M	1-244-751-11
2.0	1-244-608-11	20	1-244-632-11	200	1-244-656-11	2.0k	1-244-680-11	20k	1-244-704-11	200k	1-244-728-11	2.0M	1-244-752-11
2.2	1-244-609-11	22	1-244-633-11	220	1-244-657-11	2.2k	1-244-681-11	22k	1-244-705-11	220k	1-244-729-11	2.2M	1-244-753-11
2.4	1-244-610-11	24	1-244-634-11	240	1-244-658-11	2.4k	1-244-682-11	24k	1-244-706-11	240k	1-244-730-11	2.4M	1-244-754-11
2.7	1-244-611-11	27	1-244-635-11	270	1-244-659-11	2.7k	1-244-683-11	27k	1-244-707-11	270k	1-244-731-11	2.7M	1-244-755-11
3.0	1-244-612-11	30	1-244-636-11	300	1-244-660-11	3.0k	1-244-684-11	30k	1-244-708-11	300k	1-244-732-11	3.0M	1-244-756-11
3.3	1-244-613-11	33	1-244-637-11	330	1-244-661-11	3.3k	1-244-685-11	33k	1-244-709-11	330k	1-244-733-11	3.3M	1-244-757-11
3.6	1-244-614-11	36	1-244-638-11	360	1-244-662-11	3.6k	1-244-686-11	36k	1-244-710-11	360k	1-244-734-11	3.6M	1-244-758-11
3.9	1-244-615-11	39	1-244-639-11	390	1-244-663-11	3.9k	1-244-687-11	39k	1-244-711-11	390k	1-244-735-11	3.9M	1-244-759-11
4.3	1-244-616-11	43	1-244-640-11	430	1-244-664-11	4.3k	1-244-688-11	43k	1-244-712-11	430k	1-244-736-11	4.3M	1-244-760-11
4.7	1-244-617-11	47	1-244-641-11	470	1-244-665-11	4.7k	1-244-689-11	47k	1-244-713-11	470k	1-244-737-11	4.7M	1-244-761-11
5.1	1-244-618-11	51	1-244-642-11	510	1-244-666-11	5.1k	1-244-690-11	51k	1-244-714-11	510k	1-244-738-11	5.1M	1-244-762-11
5.6	1-244-619-11	56	1-244-643-11	560	1-244-667-11	5.6k	1-244-691-11	56k	1-244-715-11	560k	1-244-739-11		
6.2	1-244-620-11	62	1-244-644-11	620	1-244-668-11	6.2k	1-244-692-11	62k	1-244-716-11	620k	1-244-740-11		
6.8	1-244-621-11	68	1-244-645-11	680	1-244-669-11	6.8k	1-244-693-11	68k	1-244-717-11	680k	1-244-741-11		
7.5	1-244-622-11	75	1-244-646-11	750	1-244-670-11	7.5k	1-244-694-11	75k	1-244-718-11	750k	1-244-742-11		
8.2	1-244-623-11	82	1-244-647-11	820	1-244-671-11	8.2k	1-244-695-11	82k	1-244-719-11	820k	1-244-743-11		
9.1	1-244-624-11	91	1-244-648-11	910	1-244-672-11	9.1k	1-244-696-11	91k	1-244-720-11	910k	1-244-744-11		

HARDWARE NOMENCLATURE

Screw:

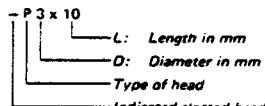

Unless otherwise indicated, it means cross-recessed head (Phillips type).

Nut, Washer, Retaining ring:



Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		brazier-head screw	

Reference Designation	Shape	Description	Remarks
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon socket set screw	ex: SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	

Sony Corporation

© 1978

9-954-649-01

78D06101-1
Printed in Japan

Note: Circled letters (Ⓐ to Ⓡ) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
SWITCHES		
S101,201	1-552-391-00	Ⓐ Lever Slide, MIC ATT
S102,202	1-552-394-00	Ⓐ Lever Slide, EQ
S103,203	1-552-392-00	Ⓐ Lever Slide, MONITOR
S104,204	1-516-367-XX	Ⓑ Push, REC/PB
S105	1-552-395-00	Ⓓ Rotary, TAPE SPEED
S301	Ⓐ 1-552-018-00	Pushbutton, POWER (US, Canadian model)
S301	Ⓐ 1-552-206-11	Ⓓ Pushbutton, POWER (AEP, UK model)
S302	1-552-393-00	Ⓒ Lever Slide, BIAS
S303	1-514-864-XX	Ⓓ Miniature, BIAS OSC
S304	1-514-643-00	Ⓑ Rotary, MUTING
S305	Ⓐ 1-514-039-12	Ⓒ Miniature, MOTOR
MISCELLANEOUS		
CNJ1	Ⓐ 1-509-546-00	Ⓒ Connector, 3p; ∼ AC IN (AEP, UK model)
CNJ2	1-509-549-00	Ⓑ Connector, REC/PB (AEP, UK model)
CP301	Ⓐ 1-231-057-31	Ⓑ Encapsulated Component (AEP, UK model)
CP301,302	Ⓐ 1-231-325-11	Encapsulated Component (US model)
CP301,302	Ⓐ 1-231-345-11	Encapsulated Component (Canadian model)
CP302	Ⓐ 1-231-325-11	Ⓒ Encapsulated Component (AEP, UK model)
F301	Ⓐ 1-532-284-00	Ⓑ Fuse, T630 mA (AEP, UK model)
HE101,201	8-825-698-00	Ⓔ Head, erase; EF18-2902
HP101,201	8-825-534-10	Ⓛ Head, playback; PF140-4202B
HR101,201	8-825-511-10	Ⓜ Head, record; RF140-2902
J101,201	1-507-587-21	Ⓒ Jack, MIC
J102,202	1-507-433-21	Ⓜ Jack, 4p; LINE IN/LINE OUT
J103,203	1-507-553-21	Ⓜ Jack, HEADPHONES
M	Ⓐ 8-832-624-56	Ⓜ Motor, IC624H1 (US, AEP, UK model)

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
M	Ⓐ 8-832-627-00	Motor, IC624H1 (Canadian model)
ME101,201	1-520-337-00	Ⓛ Meter, VU
PL101,201	1-518-115-XX	Ⓑ Lamp, 6V 35 mA
RY301	1-515-294-00	Ⓕ Relay
VS1	Ⓐ 1-552-026-00	Ⓔ Voltage Selector (AEP, UK model)
	1-464-029-00	Ⓖ OSC Pack
	Ⓐ 1-551-506-00	Cord, power (Canadian model)
	Ⓐ 1-551-508-00	Cord, power (US model)

ACCESSORIES & PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
X-2440-055-1	Ⓜ Reel Ass'y, R-7MB (UK model)
X-2440-069-0	Reel Ass'y, R-7ES (US, Canadian model)
X-2440-073-0	Ⓜ Reel Ass'y, R-7MB (AEP model)
X-3701-105-0	Ⓐ Cleaning Tip Ass'y (Canadian, AEP, UK model)
1-534-049-31	Ⓔ Cord, connection; RK-74
1-534-819-12	Ⓖ Cord, power (UK model)
3-401-193-00	Tape (US model)
3-556-528-00	Ⓖ Carton (AEP, UK, Canadian model)
3-556-529-00	Ⓑ Spacer
3-556-530-00	Ⓒ Cushion, right
3-556-531-00	Ⓒ Cushion, left
3-556-532-00	Ⓑ Cushion, bottom
3-556-534-00	Carton (US model)
3-701-630-00	Ⓐ Bag, plastic
3-701-684-11	Ⓑ Card, power voltage indication (AEP, UK model)
3-770-504-11	Ⓔ Manual, instruction (AEP, UK model)
3-770-504-21	Manual, instruction (US model)
3-770-504-21	Manual, instruction (Canadian model)
3-794-247-31	
4-848-648-00	Ⓑ Bag, protection

Note: The components identified by shading and Ⓐ mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque Ⓐ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.